



# Anemostat®

AIR DISTRIBUTION

## SUBMITTAL SHEET

www.anemostat-hvac.com



# SOUND ATTENUATOR

RECTANGULAR

LOW FREQUENCY

HOSPITAL / CLEAN ROOM

**MOLD RESISTANT COTTON FILL**

### PRODUCT FEATURES


- **FILL:** Mold resistant cotton, encapsulated in polyethylene to eliminate erosion and absorption of gases. An acoustical stand-off is placed between the perforated baffle and the fill.
- Tested in accordance with ASTM E-477
- Single piece construction from: 6" x 6" to 48" x 48"
- **ASTM-E84 Rating Characteristics:**  
Flamespread - 0  
Smoke Developed - 35

### CONSTRUCTION FEATURES

- **Casing:**  
22 Gauge Galvanized Steel
- **Baffles:**  
24 Gauge Perforated Galvanized Steel

### MODELS

- ARLUSPC** Ultra High Pressure
- ARLSPC** High Pressure
- ARLMSPC** Medium High Pressure
- ARLMPC** Medium Pressure
- ARLMLPC** Medium Low Pressure
- ARLLPC** Low Pressure
- ARLULPC** Ultra Low Pressure

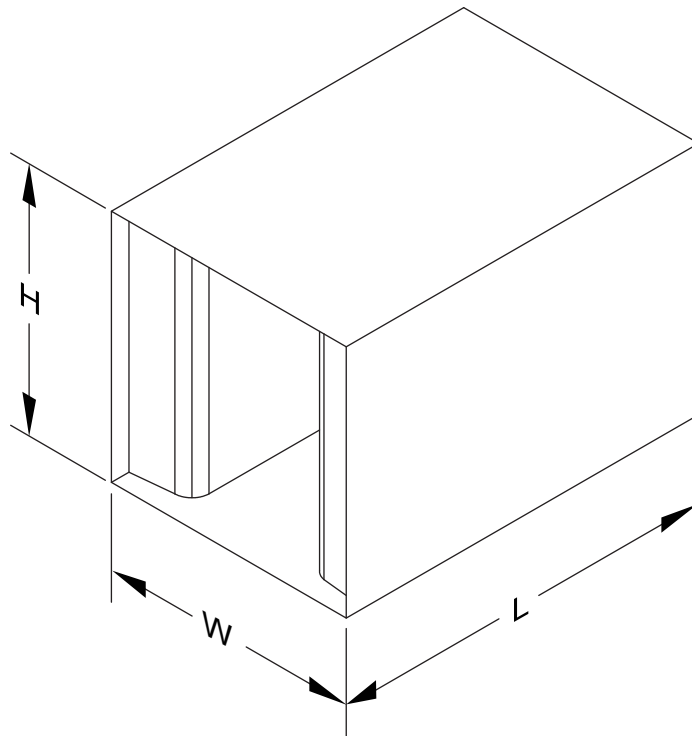

By *AEROSONICS*

All dimensions are in inches.

JOB NAME:

SUBMITTED BY: