



Anemostat®

AIR DISTRIBUTION

SUBMITTAL SHEET

www.anemostat-hvac.com



SOUND ATTENUATOR

RECTANGULAR ELBOW

STANDARD MODEL

FIBERGLASS FILL

PRODUCT FEATURES


- **FILL:** Fiberglass under compression
- Tested in accordance with ASTM E-477
- Single piece construction from:
6" x 6" to 48" x 48"
- **ASTM-E84 Rating Characteristics:**
Flamespread - 10
Smoke Developed - 10

CONSTRUCTION FEATURES

- **Casing:**
22 Gauge Galvanized Steel
- **Baffles:**
24 Gauge Perforated Galvanized Steel

MODELS

- AEUHP** Ultra High Pressure
- AEHP** High Pressure
- AEMHP** Medium High Pressure
- AEMP** Medium Pressure
- AEMPLP** Medium Low Pressure
- AELP** Low Pressure
- AEULP** Ultra Low Pressure

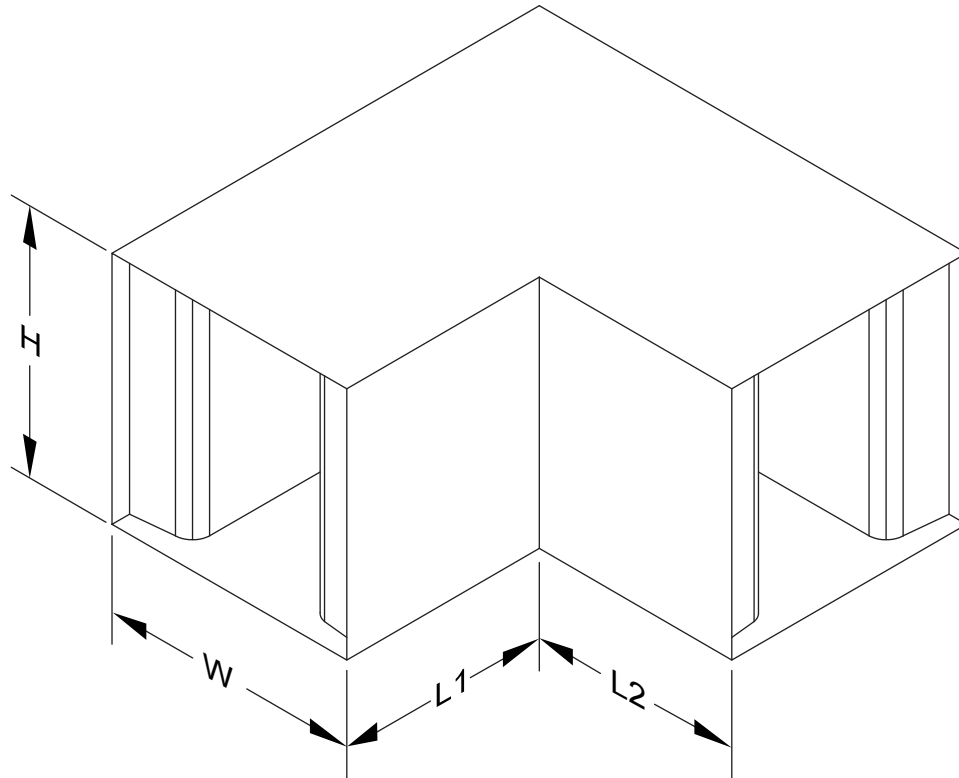

By *AEROSONICS*

All dimensions are in inches.

JOB NAME:

SUBMITTED BY: