


45° BAFFLE BLADE - STATIONARY

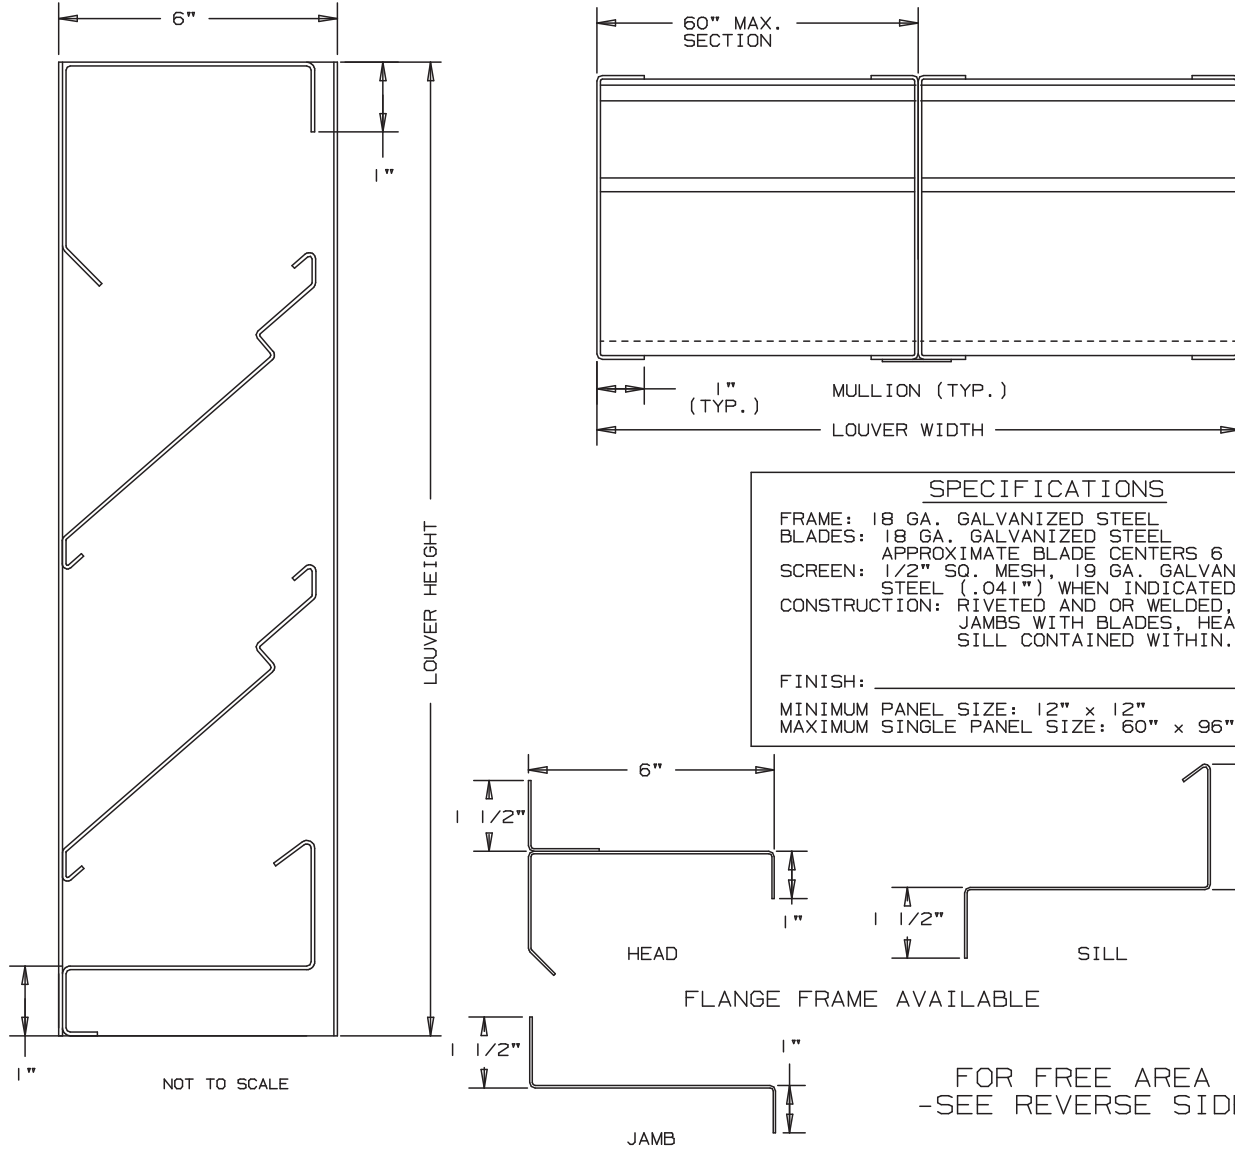

SPECIFICATIONS

FRAME: 18 GA. GALVANIZED STEEL
BLADES: 18 GA. GALVANIZED STEEL
APPROXIMATE BLADE CENTERS 6 9/16"
SCREEN: 1/2" SQ. MESH, 19 GA. GALVANIZED STEEL (.041") WHEN INDICATED
CONSTRUCTION: RIVETED AND OR WELDED, FULL JAMBS WITH BLADES, HEAD AND SILL CONTAINED WITHIN.

FINISH: _____

MINIMUM PANEL SIZE: 12" x 12" x 96"
MAXIMUM SINGLE PANEL SIZE: 60" x 96"

LOUVERS WILL BE FABRICATED 1/2" SMALLER THAN OPENING SIZE UNLESS OTHERWISE SPECIFIED.

ITEM	QTY.	WIDTH	HEIGHT	WIDTH	HEIGHT	MULL	TYPE	LOC		
		OPENING SIZE		LOUVER SIZE		SCREENS				

Anemostat Air Distribution
1220 E. Watson Center Road
Carson, CA 90745
310-835-7500 • air@anemostat.com
www.anemostat-hvac.com

AGENT: _____

ARCH./ENG.:

CONTR.:

PROJECT:

EDR: _____ ECN: _____ JOB: _____

DATE: _____ DWN.: _____ DWG.: _____

MODEL LS605B
45° BAFFLE BLADE
FORMED STEEL - STATIONARY

PERFORMANCE DATA

FREE AREA

		FREE AREA (SQ. FT.)								
		WIDTH								
		12"	18"	24"	30"	36"	42"	48"	54"	60"
HEIGHT	12"	.20	.32	.45	.57	.69	.81	.93	1.06	1.18
	24"	.59	.95	1.31	1.67	2.02	2.38	2.74	3.09	3.45
	36"	1.12	1.80	2.47	3.15	3.82	4.50	5.17	5.84	6.52
	48"	1.57	2.52	3.46	4.41	5.35	6.30	7.33	8.19	9.13
	60"	2.10	3.37	4.63	5.89	7.15	8.41	9.67	10.94	12.20
	72"	2.55	4.08	5.61	7.14	8.67	10.20	11.73	13.26	14.79
	84"	3.19	5.11	7.03	8.94	10.86	12.78	14.69	16.61	18.52
	96"	3.39	5.42	7.45	9.48	11.51	13.55	15.58	17.61	19.64