




Anemostat®
AIR DISTRIBUTION

MODEL **SC1**

EXTRUDED ALUMINUM
GRILLE SCREEN

MODULAR GRILLE SCREEN - STATIONARY

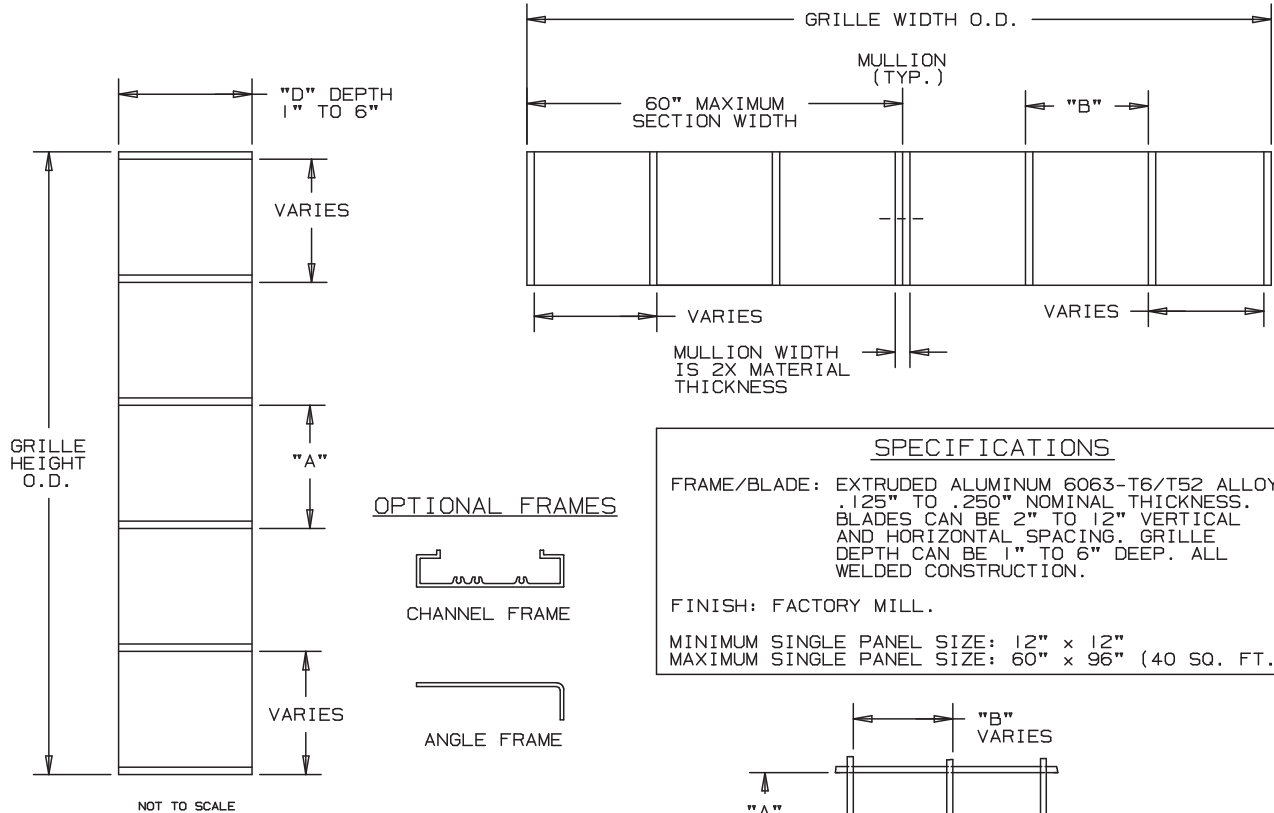


SPECIFICATIONS

FRAME/BLADE: EXTRUDED ALUMINUM 6063-T6/T52 ALLOY, .125" TO .250" NOMINAL THICKNESS. BLADES CAN BE 2" TO 12" VERTICAL AND HORIZONTAL SPACING. GRILLE DEPTH CAN BE 1" TO 6" DEEP. ALL WELDED CONSTRUCTION.

FINISH: FACTORY MILL.

MINIMUM SINGLE PANEL SIZE: 12" x 12"
MAXIMUM SINGLE PANEL SIZE: 60" x 96" (40 SQ. FT.)

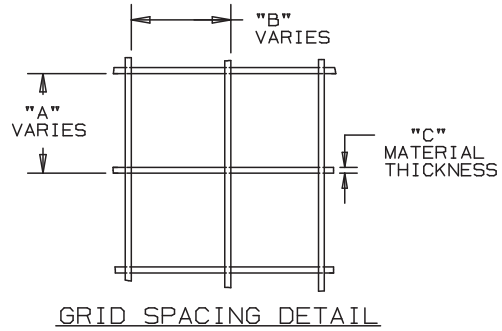

- "A" = 2" TO 12" (HORIZONTAL BLADE SPACING)
- "B" = 2" TO 12" (VERTICAL BLADE SPACING)
- "C" = .125" TO .250" (MATERIAL THICKNESS)
- "D" = 1" TO 6" (GRILLE DEPTH)

NOMINAL DEDUCTIONS WILL BE MADE TO OPENING SIZES GIVEN.

ITEM	QTY.	WIDTH OPENING SIZE	HEIGHT	WIDTH GRILLE SIZE (O.D.)	HEIGHT	MULL.	"A"	"B"	"C"	"D"



Anemostat Air Distribution
1220 E. Watson Center Road
Carson, CA 90745
310-835-7500 • air@anemostat.com
www.anemostat-hvac.com

AGENT : _____

ARCH./ENG. : _____

CONTR. : _____

PROJECT : _____

EDR : _____ ECN : _____ JOB : _____

DATE : _____ DWN. : _____ DWG. : _____