

# SUBMITTAL SHEET

## PRODUCT FEATURES

- Louvers fixed at 45° or 0°
- Optional stainless steel opposed blade volume control damper, face operated (OBD)
- Countersunk screw holes and stainless steel screws

## CONSTRUCTION DETAILS

**Material:** 20 GA 304 stainless steel (std)

20 GA 316 stainless steel (opt)

**Finish:** Satin polish (std)


## Models

**35-0** 0° deflection, 1/2" spacing

**35-45** 45° deflection, 1/2" spacing

## Accessories

**OB** Opposed Blade Damper

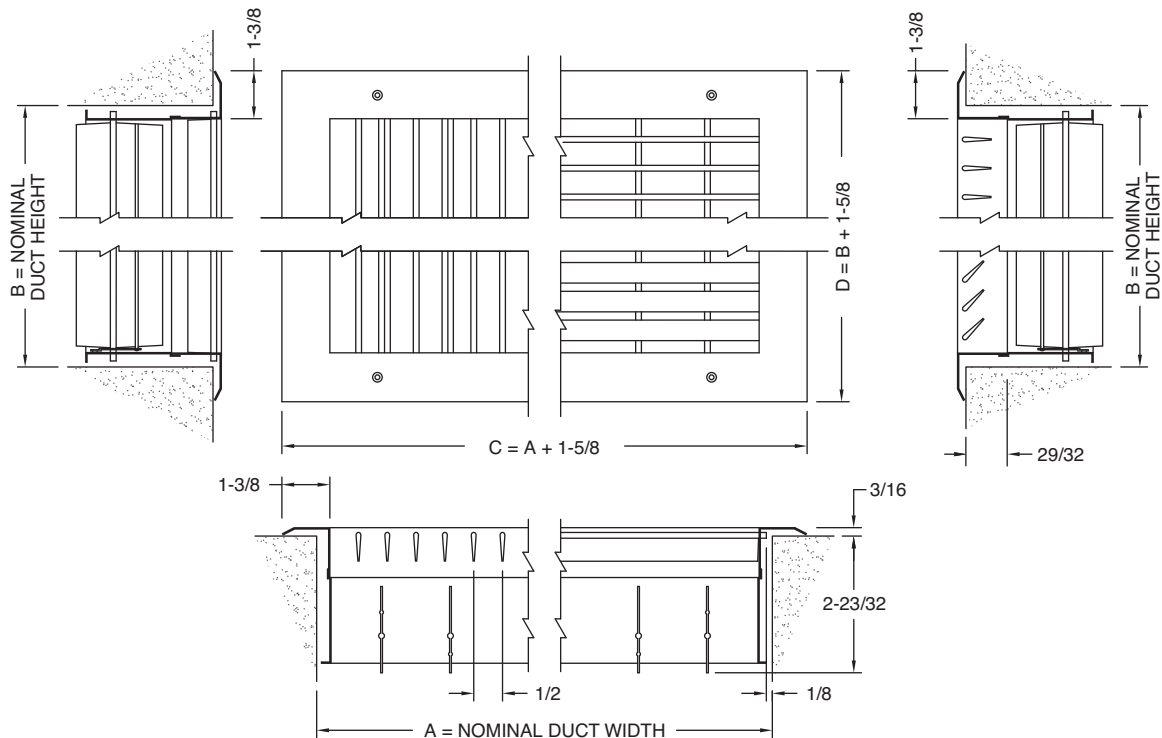

All dimensions are in inches.

JOB NAME:

SUBMITTED BY: