


- Mesurflo Fixed Auto Flow Control
- Changeable Flow Cartridge (In-Line)
- .50 – 9.0 GPM
- Sizes 1/2", 3/4", 1"

Standard Features:

- FNPT and MNPT Inlet / Outlet Connections
- Changeable GPM Flow Cartridges
- Differential Operating Pressure:
 2-80 PSID 0.50-5.00 GPM
 3-80 PSID 5.50-9.00 GPM
- ± 10% Accuracy
- Operating Temperature Range
 32°F to 225° F
- 1/4" Pressure / Temperature Ports
- Dryseal Pipe Threads
- Valve Body Suitable for 600 PSIG
- Valves Labeled with Model No., Size & Flow Rate

Options:

- Pressure Taps
- Extended Pressure / Temperature Ports
- Stainless Steel Tag-Chain Upon Request

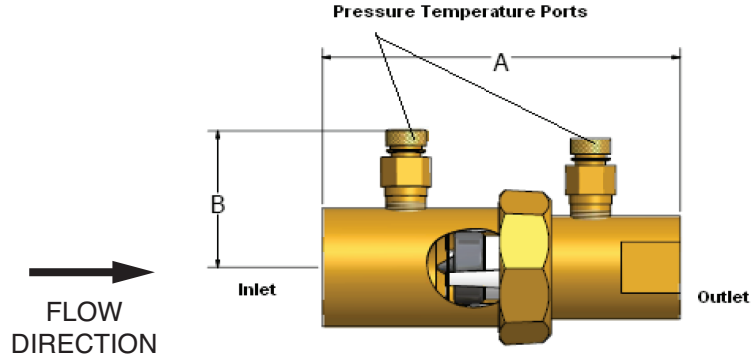

| Dimensions | | | |
|------------|----|----|----|
| A | | B | |
| IN | MM | IN | MM |
| 3.07 | 78 | 2 | 51 |

| MATERIAL SPECIFICATIONS | |
|-----------------------------|-------------------|
| Valve Body | Brass |
| Union Nut | Brass |
| Tailpiece | Brass |
| Pressure/ Temperature Ports | Brass |
| O-Rings | EPDM |
| Diaphragm | EPDM |
| Retainer Ring | StainlessSteel |
| Orifice | Polyphenylsulfone |

Manufactured by Hays Fluid Controls

All dimensions are in inches.

JOB NAME:

SUBMITTED BY: