

Model **2516**


- Manual Ball Valve
- Mesurflo Fixed Auto Flow Control
- Changeable Flow Cartridge (Y-Body)
- .50 – 9.0 GPM
- Sizes 1/2", 3/4", 1"

Standard Features:

- FNPT, FSWT and MNPT Outlet / Inlet Connections
- Changeable GPM Flow Cartridges
- Differential Operating Pressure:
2-80 PSID 0.50-5.00 GPM
3-80 PSID 5.50-9.00 GPM
- ± 10% Accuracy
- Operating Temperature Range
32°F to 225° F
- 1/4" Pressure / Temperature Ports
- Short or Lever Handle
- Inlet and Outlet Port Options
- Valves Labeled with Model No., Size & Flow Rate
- Dryseal Pipe Threads
- Valve Body Suitable for 600 PSIG

Options:

- Extended Handles
- Extended Pressure / Temperature Ports
- Stainless Steel Tag-Chain Upon Request

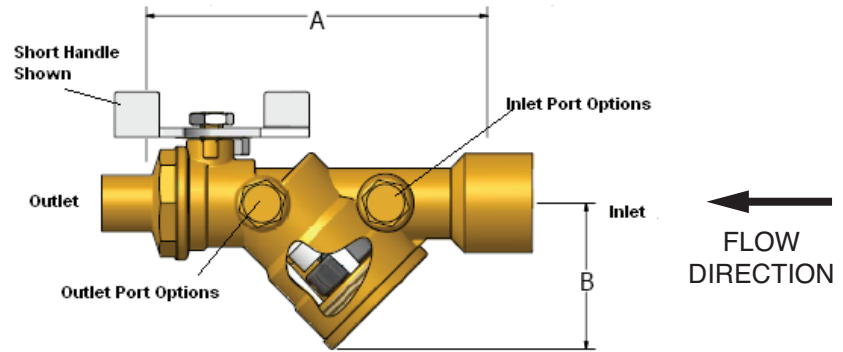

Dimensions			
A		B	
IN	MM	IN	MM
5.2	132	1.5	38

MATERIAL SPECIFICATIONS	
Valve Body	Brass
Ball	Chrome Plated Brass
Pressure/ Temperature Ports	Brass
O-Rings	EPDM
Ball Seat	Teflon
Stem	Brass
End Cap	Brass
Diaphragm	EPDM
Ball Valve End Fitting	Brass
Short Handle	Zinc Plated Steel
Orifice	Polyphenylsulfone

Manufactured by Hays Fluid Controls

All dimensions are in inches.

JOB NAME:

SUBMITTED BY: