

Model **2520**


- Mesurflo Fixed Auto Flow Control
- Changeable Flow Cartridge (In-Line)
- .50 – 25.0 GPM
- Sizes 3/4", 1"

**Standard Features:**

- FNPT and MNPT Inlet Connections
- FNPT, FSWT and MNPT Outlet Connections
- Changeable GPM Flow Cartridges
- Differential Operating Pressure  
2-80 PSID Range 0.50 - 5.00 GPM  
3-80 PSID Range 5.50 - 17.0 GPM  
5-80 PSID Range 18.0 - 25.0 GPM
- ± 10% Accuracy
- Operating Temperature Range  
32°F to 225° F
- 1/4" Pressure / Temperature Ports
- Valves Labeled with Model No., Size & Flow Rate
- Dryseal Pipe Threads
- Valve Body Suitable for 600 PSIG

**Options:**

- Plugged (Ports Machined w/1/4" Plug)
- Extended Pressure / Temperature Ports
- Pressure Taps
- Stainless Steel Tag-Chain Upon Request

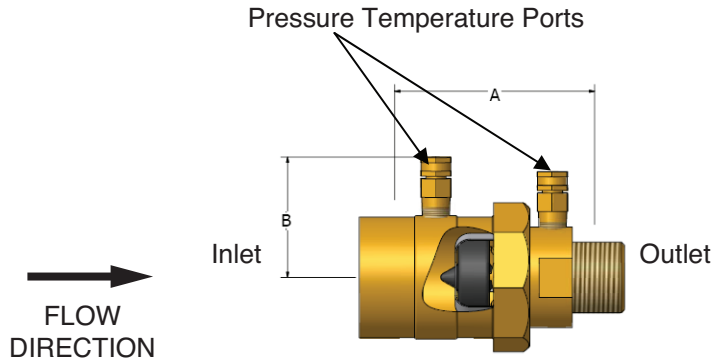

Dimensions			
A		B	
IN	MM	IN	MM
3.9	99	1-1/8	29

MATERIAL SPECIFICATIONS	
Valve Body	Brass
Union Nut	Brass
Tailpiece	Brass
Pressure/ Temperature Ports	Brass
O-Rings	EPDM
Diaphragm	EPDM
Retainer Ring	StainlessSteel
Orifice	Polyphenylsulfone

Manufactured by Hays Fluid Controls

All dimensions are in inches.

**JOB NAME:**

**SUBMITTED BY:**