


Model **2511**

- Mesurflo Fixed Auto Flow Control
- Non-Removable Flow Cartridge (In-Line)
- .50 – 9.0 GPM
- Sizes 1/2", 3/4"

Standard Features:

- FSWT Inlet / Outlet Connections
- Differential Operating Pressure:
2-80 PSID 0.50-5.00 GPM
3-80 PSID 5.50-9.00 GPM
- ± 10% Accuracy
- Operating Temperature Range
32°F to 225° F
- Available in 4" or 5-1/2" Lengths
- Valve Body Suitable for 522 PSIG
- Valves Labeled with Model No., Size & Flow Rate

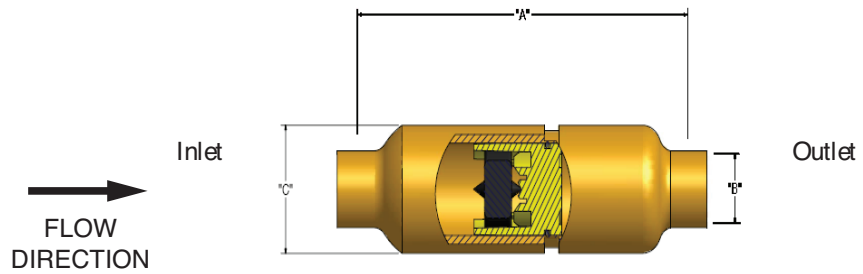

Dimensions								
1/2"				3/4"				
	4"(114)		5-1/2"(140)		4"(114)		5-1/2"(140)	
	IN	MM	IN	MM	IN	MM	IN	MM
A	3.0	76	4.5	114	3.0	76	4.5	114
B	0.63	16	0.63	16	0.88	22	0.88	22
C	1.4	36	1.4	36	1.4	36	1.4	36

MATERIAL SPECIFICATIONS	
Valve Body	Copper
O-Rings	EPDM
Retainer	Stainless Steel
Diaphragm	EPDM
Orifice	Polyphenylsulfone

Manufactured by Hays Fluid Controls

All dimensions are in inches.

JOB NAME:

SUBMITTED BY: