


Model **2521**

- Mesurflo Fixed Auto Flow Control
- Non-Removable Flow Cartridge (In-Line)
- .50 – 25.0 GPM
- Sizes ¾", 1"

Standard Features:

- FSWT Inlet / Outlet Connections
- Differential Operating Pressure:
3-80 PSID 9.0-17.0 GPM
5-80 PSID 18.0-25.0 GPM
- ± 10% Accuracy
- Operating Temperature Range
32°F to 225° F
- Valves Labeled with Model No., Size & Flow Rate
- Valve Body Suitable for 522 PSIG

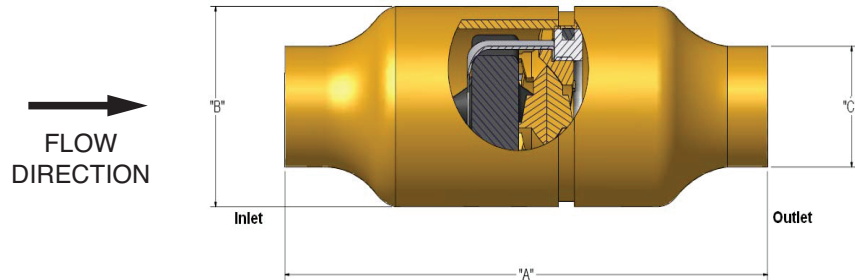

Dimensions				
Size	¾"(19)		1"(25)	
	IN	MM	IN	MM
A	6.0	152	6.0	152
B	2.1	53	2.1	53
C	.88	22	1.13	29

MATERIAL SPECIFICATIONS	
Valve Body	Copper
O-Rings	EPDM
Retainer Cage	StainlessSteel
Diaphragm	EPDM
Orifice	Polyphenylsulfone
Orifice Holder	Brass
Cartridge Holder	Brass

Manufactured by Hays Fluid Controls

All dimensions are in inches.

JOB NAME:

SUBMITTED BY: