

Model **MBV-1**

- Manual Ball Valve (In-Line)
- FNPT Connections
- Sizes 1/2", 3/4", 1"

Specifications:

- Non Ported or Ported
- Minimum Working Pressure: 400 PSIG WOG
- Minimum Temperature: 32° F
- Maximum Temperature: 300° F
- Lever Handle
- Blow Out Proof/Double O-Ring
- Inlet Connections FNPT
- Outlet Connections FNPT
- Thread Fittings NPT per ASME/ANSI B1.20. and B31.9

Options:

- Extended Handle
- Pressure Temperature Ports
- Extended Pressure Temperature Port
- Short Handle
- Memory Stop

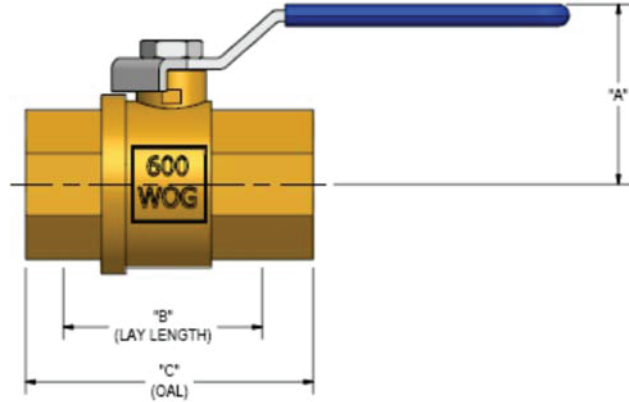


Table			
SIZE	"A"	"B"	"C"
1/2	1.7	1.1	2.3
3/4	2.0	1.2	2.5
1	2.0	1.5	3.2
1 1/4	2.8	1.8	3.7
1 1/2	3.1	2.2	4.0
2	3.3	2.7	4.8

MATERIAL SPECIFICATIONS	
Seats	PTFE
Ball	Brass
Stem	Brass
Handle	Steel Zn Plated
Valve Body	Brass
O-Rings	EPDM
Pressure/Temperature Port	Brass

Manufactured by Hays Fluid Controls

All dimensions are in inches.

JOB NAME:

SUBMITTED BY: