


# SUBMITTAL SHEET

www.anemostat-hvac.com

The manual air vent features a blowout-proof actuating stem within a sturdy housing. The stem is equipped with a knurled thumbwheel and the stem is slotted for quick and easy operation. The side discharge ensures that the vented air / water mixture does not shoot straight out the top at the operator. The blowout-proof actuating stem is encapsulated so that it cannot be totally removed from housing.

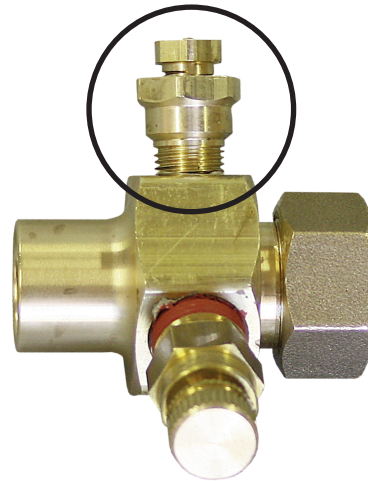

Dimensions*		
Size (In)	"A"	"B"
1/2 (YS)	2.0	3.4
3/4 (YS)	2.0	3.4
3/4 (YM)	2.0	4.2
1 (YM)	2.0	4.2
1-1/4 (YL)	2.2	3.7
1-1/2 (YL)	2.2	3.7
2 (YX)	7.5	3.1

\* Dimensions listed are approximate. Various connections types can change the lay lengths. Consult factory for more detail.

<sup>1</sup> Extended Handles cannot be ordered without extended Pressure / Temperature Ports

MATERIAL SPECIFICATIONS	
PSIG / Temperature Rating:	400 PSIG / 325° F
Housing Material	Brass
Stem Material	Brass
Stem Type	Blowout Proof (Non removeable)
O-Ring Material	Viton
Connection Thread	1/4" MNPT

Manufactured by Hays Fluid Controls

All dimensions are in inches.

JOB NAME:

SUBMITTED BY: