MODEL
- ❑ **MVC** - PERIMETER AIR CURTAIN DIFFUSERS USED IN AORTA SYSTEMS

INSTALLATION
- ❑ LAY-IN T-BAR GRID SYSTEM
- ❑ SURFACE / HARD CEILING (SPECIFY BATTEN ARRANGEMENT PAGE A-33)

SYSTEM CAPACITY
- ❑ 31
- ❑ 53
- ❑ 42
- ❑ 64

NOMINAL LENGTH
- ❑ 2'
- ❑ 5'
- ❑ 3'
- ❑ 6'
- ❑ 4'

INLET SIZES
- ❑ 6" - 9" Ø (TOP)
- ❑ 12" x 6" (SIDE)
- ❑ 18" x 6" (SIDE)
- ❑ 24" x 6" (SIDE)

MATERIAL AND FINISH

FACE
- ❑ STEEL WITH WHITE BAKED EPOXY
- ❑ ALUMINUM WITH WHITE BAKED EPOXY
- ❑ 304 STAINLESS STEEL, #4 POLISH
- ❑ 304 STAINLESS STEEL WITH WHITE BAKED EPOXY

BACKPAN / PLENUM
- ❑ STEEL WITH WHITE BAKED EPOXY
- ❑ ALUMINUM WITH WHITE BAKED EPOXY
- ❑ 304 STAINLESS STEEL, 2B MILL FINISH
- ❑ 304 STAINLESS STEEL WITH WHITE BAKED EPOXY

FOR ALUMINUM ANODIZED FINISHES, CONTACT FACTORY.

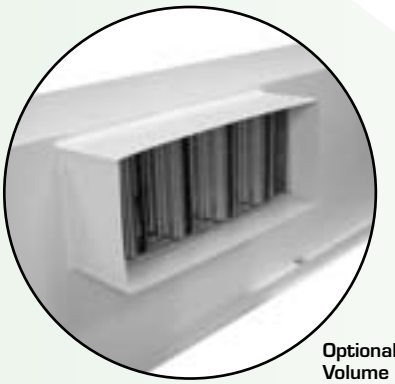

Optional Opposed Blade Volume Control Damper

ACCESSORIES
- ❑ 1/2" FOIL FACED EXTERNAL INSULATION
- ❑ OPPOSED BLADE VOLUME CONTROL DAMPER - CABLE DRIVE