
SUBMITTAL SHEET

P.O. BOX 4938 • 1220 WATSONCENTER ROAD • CARSON, CA 90745-4206 (310) 835-7500 • FAX (310) 835-0448

e-mail: airsec@anemostat.com • website: www.anemostat.com

RRLG MAXIMUM SECURITY

RISK RESISTANT EXTRA HEAVY DUTY LOUVERED GRILLE

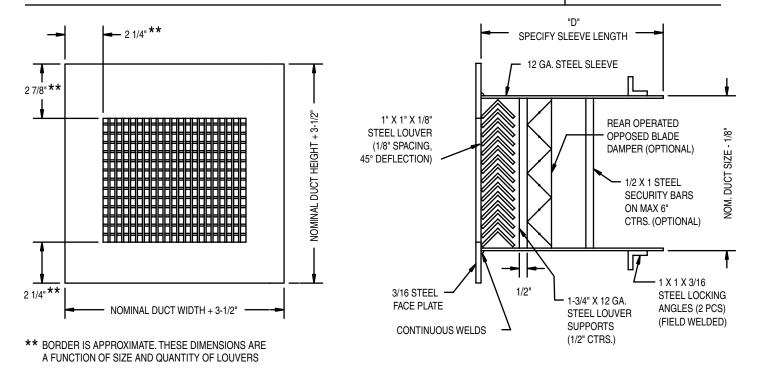

IMPORTANT: It is the specifier's responsibility to properly configure the HVAC system to meet the appropriate level of comfort, safety, security and detention

Face Plate	Security Bars -(optional)	Qty.	Order Size (Nominal Duct)		Sleeve Length
☐ 3/16" (standard) ☐ 12 GA. (optional) ☐ 10 GA. (optional) ☐ Other	☐ 1/2" x 1" flat steel (max. 6" ctrs.) ☐ Other	<u> </u>	W" x	H"	D
Sleeve 12 GA. (standard) 10 GA. (optional) 3/16" (optional) Other Locking Angles (two pieces) 1" x 1" x 3/16" (standard) 1-1/2" x 1-1/2" x 3/16" (optional) 2" x 2" x 3/16" (optional) Other Material Cold Rolled Steel (standard) *Stainless Steel (optional) *Stainless Steel (optional) *Aluminum (optional) *Galvanized (optional) Other *consult factory for availability	Opposed Blade Damper -(optional) Rear Operated Other Anchoring Studs -(optional) Nelson Type (3" x 3/8") Other Locking Frame -(optional) 1" x 1" x 3/16" (field welded) Other Adapter -(optional) Square to round (shipped loose) Finish White Powder Coat (standard) Rust Inhibiting Prime Coat (optional) Other Other Options (please specify)				
SUBMITTAL APPROVAL Job Name and Location					
Engineer	Factory				

Date

Date

Submitted By

Mfr. Rep.