

# S-VENT<sup>®</sup>


## SUBMITTAL SHEET



1220 WATSONCENTER ROAD • CARSON, CA 90745-4206  
 (310) 835-7500 • FAX (310) 835-0448  
 e-mail: airsec@anemostat.com • website: www.anemostat-hvac.com

# SV2-\_\_-RM

SPECIFY TYPE  
**MAXIMUM SECURITY GRILLE**  
 3/16" X 3/16" OPENING  
 REAR MOUNTED

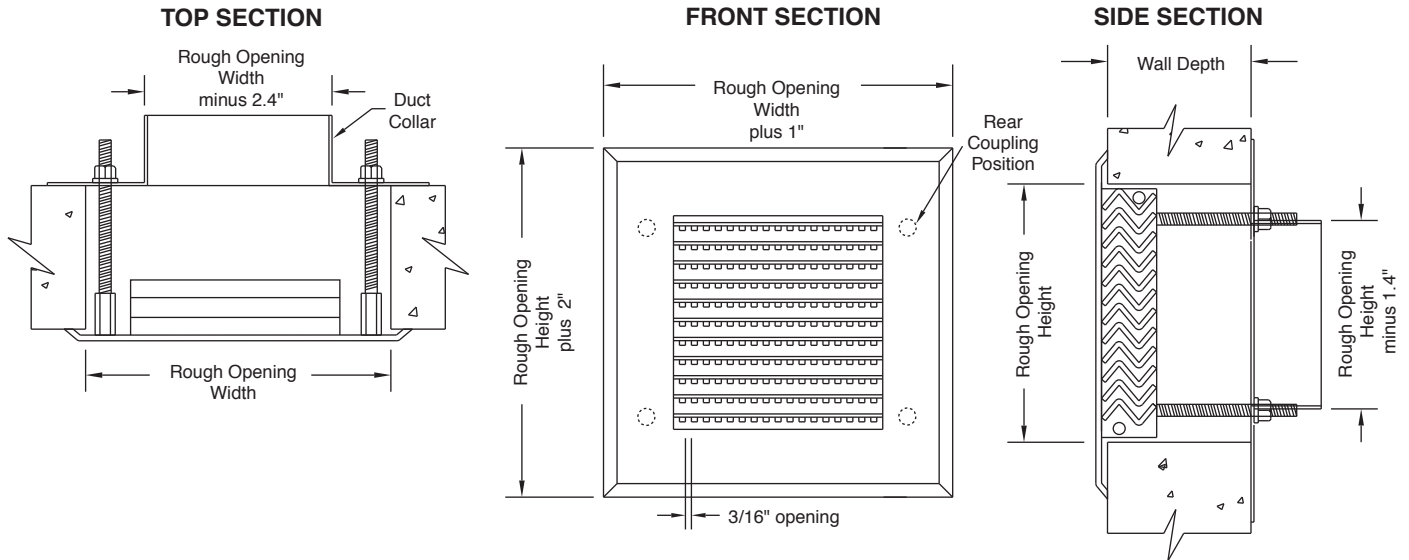

**IMPORTANT:** It is the specifier's responsibility to properly configure the HVAC system to meet the appropriate level of comfort, safety, security and detention

## PRODUCT FEATURES

### Face Flange

14 GA (standard)

### Material Type

Cold Rolled Steel (standard)

### Horizontal Louvers/Vertical Mullions

14 GA with 1 7/16" Neck Depth (std)

### Duct Collar

14 GA (standard)

### Coupling Nuts with Threaded Rods

(standard)

### Finish

White Powder Coat (std)

Other Powder Coat Colors \_\_\_\_\_

### Opposed Blade Damper (optional) (shipped loose)

Rear Operated

**MUST SPECIFY TYPE (BASED ON ROUGH OPENING SIZE)  
 AS PART OF MODEL NUMBER WHEN PLACING ORDER**

### ROUGH OPENING SIZES (WIDTH X HEIGHT)

Dimensions in Inches	WIDTH								
	6.4	8.4	10.4	12.4	14.4	16.4	18.4	20.4	22.4
5.4	A1	B1	C1	D1	E1	F1	G1	H1	J1
7.4	A2	B2	C2	D2	E2	F2	G2	H2	J2
9.4	A3	B3	C3	D3	E3	F3	G3	H3	J3
11.4	A4	B4	C4	D4	E4	F4	G4	H4	J4
13.4	A5	B5	C5	D5	E5	F5	G5	H5	J5
15.4	A6	B6	C6	D6	E6	F6	G6	H6	J6
17.4	A7	B7	C7	D7	E7	F7	G7	H7	J7
19.4	A8	B8	C8	D8	E8	F8	G8	H8	J8
21.4	A9	B9	C9	D9	E9	F9	G9	H9	J9

QTY	TYPE	ROUGH OPENING W" X H"	WALL DEPTH
27	C4	10.3 X 11.4	6"

## SUBMITTAL APPROVAL

<b>Job Name and Location</b>			
<b>Engineer</b>	Date	<b>Factory</b>	Date
<b>Mfr. Rep.</b>	Date	<b>Submitted By</b>	Date