

APPLICATION

- Supply air diffuser for Architects who prefer maximum integration of air outlets with the ceiling system – diffuser accepts ceiling tile to match grid system
- Recommended for constant or variable air volume heating, cooling, or ventilating
- Nominal 24 x 24 module size
- Lay-in T-bar or 9/16" narrow slot suspended grid systems

PRODUCT FEATURES

- Full-faced diffuser with no visible border
- 1, 2, 3, or 4 perimeter slots
- 4 way discharge pattern
- Aluminum construction for maximum corrosion protection
- Includes integral, steel square to round duct adapter for easy flex duct connection
- Removable inner assembly, without tools, for tile installation and optional volume damper adjustments
- Arctic White baked-on finish – entire assembly




Model TML (2 Slot Shown)

DIFFUSER OPTIONS

- Blank-off baffles for directional control from 4-way to 3, 2, or 1 way blow – factory installed.
- Optional Anemostat colors
- Custom color matching
- Model **VD** butterfly volume control damper
- Model **TBF** auxiliary mounting frame for hard / plaster ceilings

MODEL TML - Lay-In T-Bar

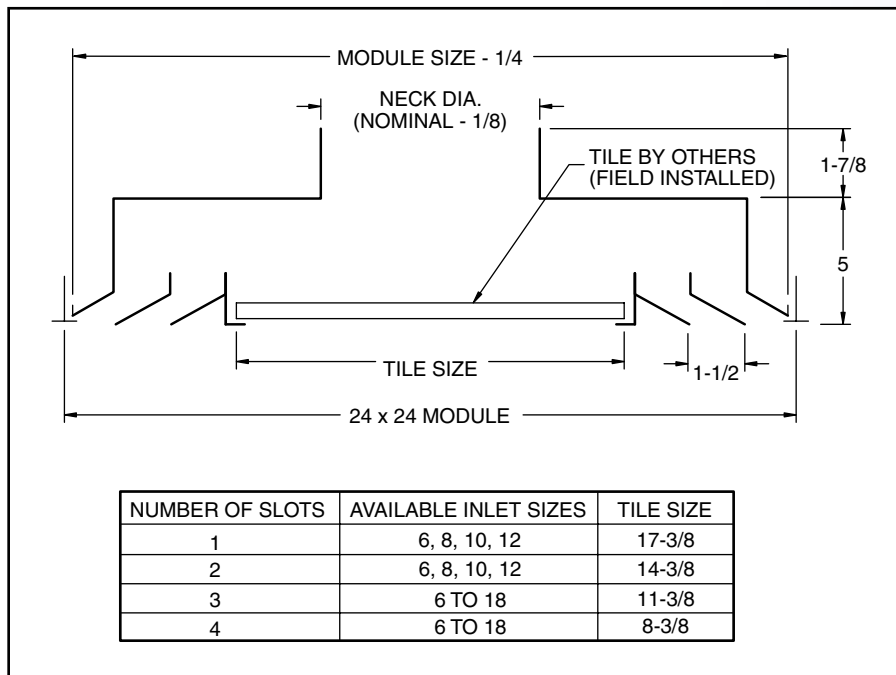

MODEL TMW

