



Anemostat®

SECURITY AIR DISTRIBUTION


Model **ASLG**

SUBMITTAL SHEET

www.anemostat-hvac.com

HEAVY DUTY SECURITY GRILLE

LOUVERED • 0° DEFLECTION

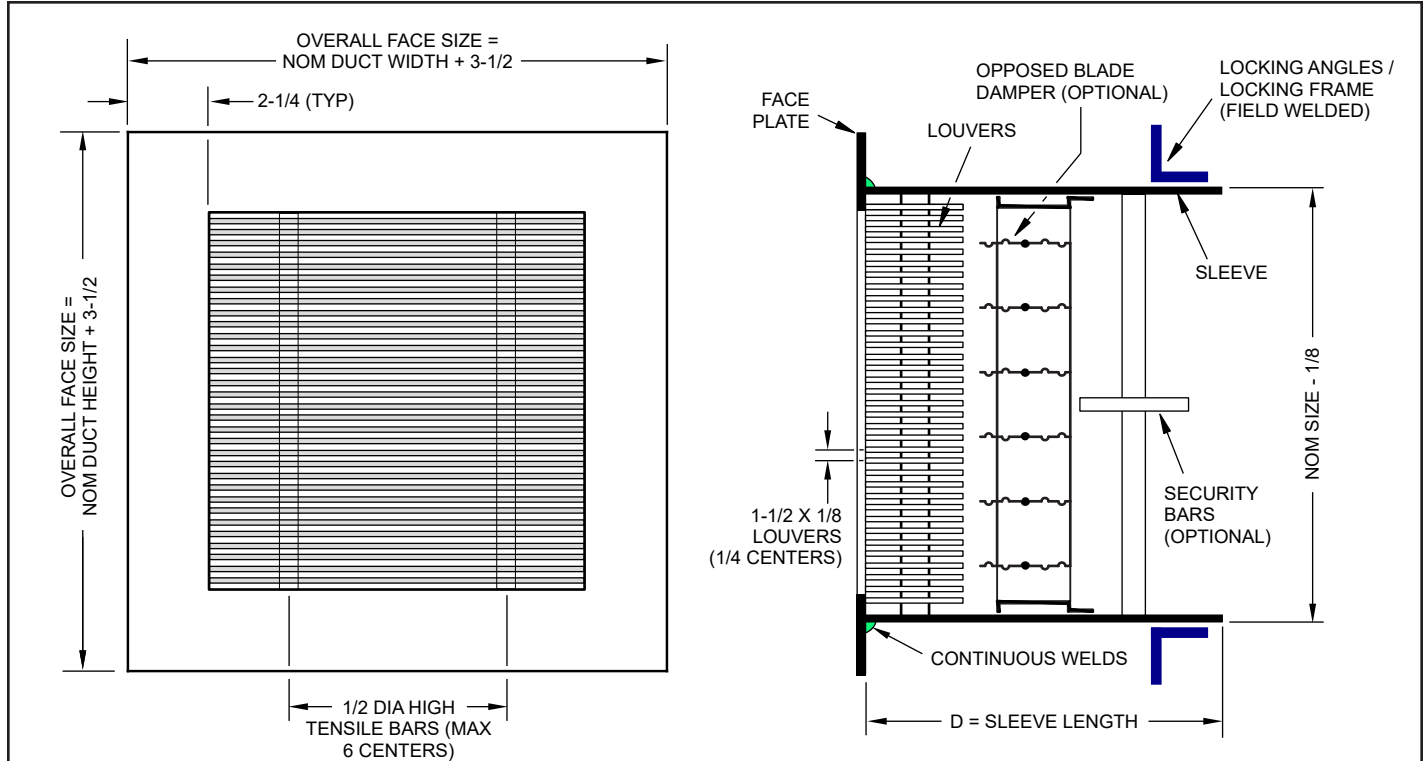

IMPORTANT: It is the specifier's responsibility to properly configure the HVAC system to meet the appropriate level of comfort, safety, security and detention

PRODUCT FEATURES

Face Plate Thickness

- ☐ 3/16" GA. (STANDARD)
☐ 10 GA. ☐ 12 GA.
☐ Other _____

Sleeve Thickness

- ☐ 12 GA. (STD) ☐ 10 GA. ☐ 3/16"
☐ Other _____

Material

- ☐ Plain Steel (STANDARD) ☐ Aluminum*
☐ 304 Stn Stl* ☐ 316 Stn Stl* ☐ Galvanized*
☐ Other _____

*(Consult factory for availability)

Finish

- ☐ White Powder Coat (STANDARD)
☐ Rust-Inhibiting Primer
☐ Other _____

Locking Angle (2 Pieces)

- ☐ 1" x 1" x 3/16" (STANDARD)
☐ 1-1/2" x 1-1/2" x 3/16"
☐ 2" x 2" x 3/16"
☐ Other _____

Locking Frame

- ☐ 1" x 1" x 3/16" (Optional)
☐ Other _____

OPTIONAL ACCESSORIES

- ☐ Security Bars in Sleeve (see detail sheet)
☐ Anchoring Studs - Nelson Type (see detail sheet)
☐ Model OB-1 Opposed Blade Damper - Rear Operated
☐ Model SRA Square to Round Duct (ships loose)
☐ Other Options (please specify)

All dimensions are in inches.

Q T Y	Order Size (NOM DUCT SIZE)		
	W	H	D

All dimensions are in inches.

JOB NAME:

SUBMITTED BY: