



Anemostat®

SECURITY AIR DISTRIBUTION


Model **DP-MS**

SUBMITTAL SHEET

www.anemostat-hvac.com

SECURITY DIRECTIONAL DIFFUSER

24" x 24" LAY-IN T-BAR SECURITY GRID SYSTEMS

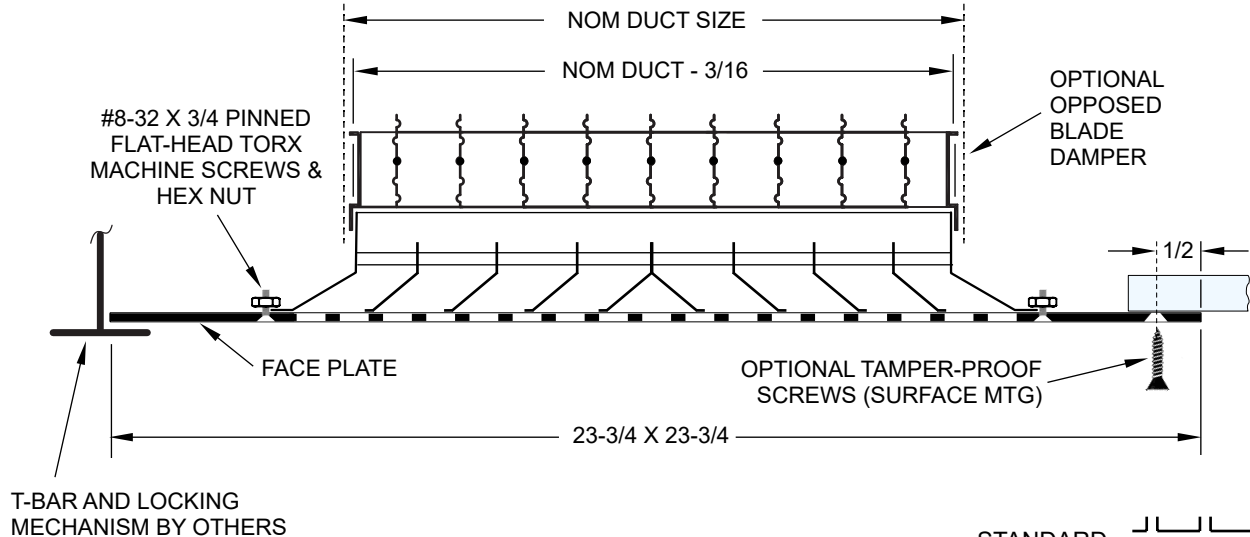

NOTES

- Available in square or rectangular duct sizes from 06" x 06" up to 18" x 18" in 3" increments
- Available core / blow patterns, see submittal sheet # D-S-1002

STANDARD	
FACE PLATE	
PATTERN	
13/16" SQ	
HOLES ON 1"	
CENTERS (P2)	

IMPORTANT: It is the specifier's responsibility to properly configure the HVAC system to meet the appropriate level of comfort, safety, security and detention

PRODUCT FEATURES

All dimensions are in inches.

Face Plate Thickness

- ☐ 12 GA. (STANDARD)
☐ 10 GA. ☐ 14 GA.
☐ Other _____

Perforated Hole Pattern

- ☐ (P2) 13/16" Sq. Holes on 1" Centers (STD)
☐ (P1) 9/16" Sq. Holes on 11/16" Centers
☐ (P8) 1/4" Dia. Holes on 3/8" Staggered Ctrs
☐ (P9) 5/16" Dia. Holes on 7/16" Staggered Ctrs
☐ Other _____

Material

- ☐ Plain Steel (STANDARD)
☐ 304 Stainless Steel* ☐ 316 Stainless Steel*
☐ Aluminum* ☐ Galvanized*
☐ Other _____

*(Consult factory for availability)

Finish

- ☐ White Powder Coat (STANDARD)
☐ Rust-Inhibiting Primer
☐ Other _____

Optional Tamper-Proof Screws (Surface)

- ☐ #10 x 1-1/2" Pinned Flat Head Torx Sheet Metal Screws
☐ No Surface Mounting Screw Holes / Screws
☐ Other _____

OPTIONAL ACCESSORIES

- ☐ Model OB-1 Opposed Blade Damper - Front Operated, Attached (requires hole drilled in core for damper access)
☐ Model OB-1 Opposed Blade Damper - (Ships Loose)
☐ Model SRA Square to Round Duct (ships loose)
☐ Other Options (please specify)

Q T Y	Order Size (NOM DUCT SIZE)		CORE PATTERN
	W	H	

JOB NAME:

SUBMITTED BY: