
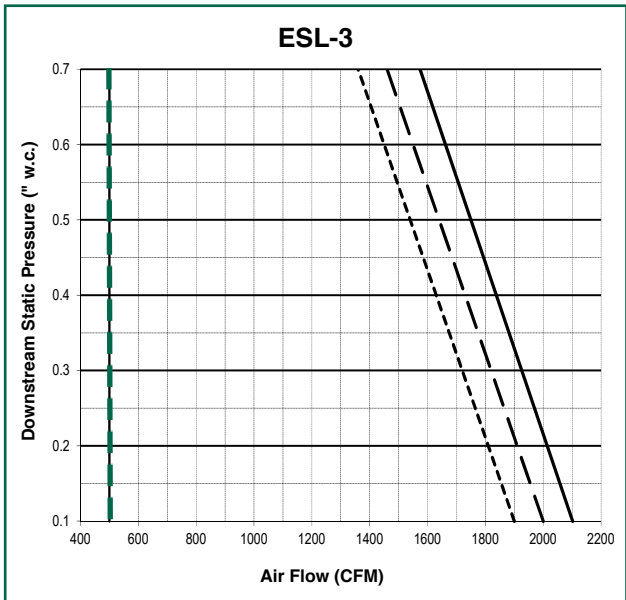
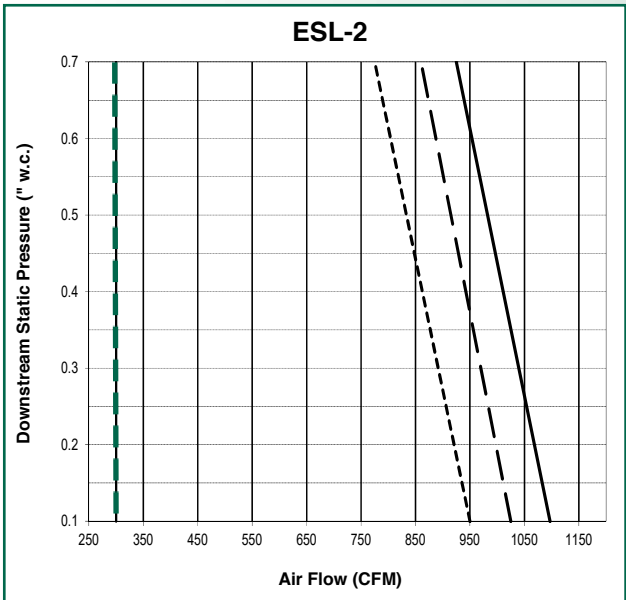


Graph 1: Fan Performance Data: Cooling Only, Electric Heat, 1&2 Row Hot Water Coil
120 / 208 / 240 / 277 VAC, 1Ø, 60 Hz

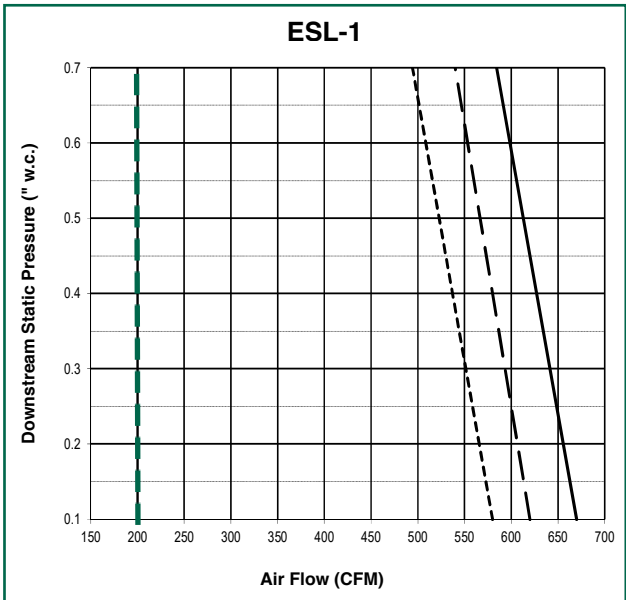

— Model ESLS (Cooling Only), Model ESLE (Electric Heat)
- - - Model ESLW (1-Row Hot Water Coil)
· · · Model ESLW (2-Row Hot Water Coil)

	EC Motor Amps (FLA)		
	ESL-1	ESL-2	ESL-3
120 vac	4.6	6.6	9.2
208 vac	3.0	4.2	6.0
240 vac	2.8	3.9	5.6
277 vac	2.5	3.4	5.0

Notes:

1. A minimum Downstream Static Pressure of .10\" wc is required.
2. An ECM motor controller is standard on all Model ESL fan terminals.