Anemostat®
SUBMITTAL

1220 Watson Center Road • Carson, CA 90745-4206
(310) 835-7500 • FAX (310) 835-0448
air@anemostat.com • www.anemostat.com

Model XEZTS
SINGLE DUCT EXHAUST TERMINAL
STANDARD

AIR TERMINALS

PRODUCT FEATURES

- 22 gauge zinc-coated steel, low leakage casing construction sealed to limit leakage to <1% of max rated flow at 3" w.g. static pressure.
  Optional:
  ☐ 20 gauge construction ☐ Galvanized
  ☐ 304/316 Stainless Steel ☐ Aluminum
- 1/2" dual density insulation (NFPA 90A, UL 181).
  Optional:
  ☐ 1" dual density glass fiber insulation
  ☐ 1/2" ☐ 1" foil faced glass fiber insulation – metal taped edges (ASTM C665)
  ☐ 1" Fibre-Lok insulating system – foil faced insulation with steel encapsulated edges (ASTM C665)
  ☐ 3/8" fiber free closed cell foam insulation (NFPA255, UL181)
  ☐ No insulation
- 90° inlet damper with leak resistant perimeter seal limiting leakage to <1% of max rated flow at 3" w.g. inlet static pressure.
- Multi-Point center averaging Velocity Wing air flow sensor for accuracy to ± 5% of design flow. Flow taps for air flow measurement provided with factory mounted controls.
- Slip & drive cleat inlet connection.
- Choice of right hand or left hand control position.
- Optional Accessories:
  ☐ Unit mounting brackets (field installed)
  ☐ Std. Control enclosure ☐ Screw attached cover ☐ Hinged front cover
  ☐ Large control enclosure ☐ Screw attached cover
- Control System ☐ Electronic Analog ☐ Digital ☐ Pneumatic ☐ Electric ☐ None – No controls
- Control Package _____ ☐ Field Installed Controls

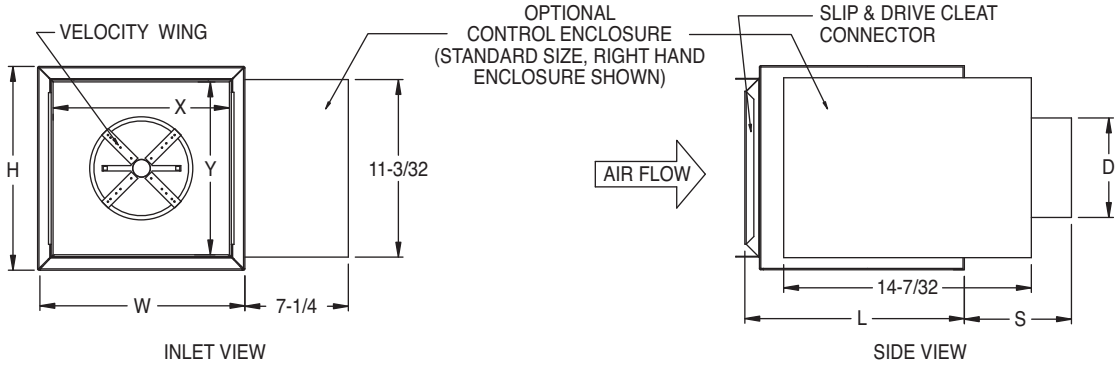

INLET VIEW

SIDE VIEW

SIZE	D	W	H	X	Y	L	S	WEIGHT
05	4 7/8	10	10	8 3/4	8 3/4	12 1/2	3	9 LBS
06	5 7/8	10	10	8 3/4	8 3/4	12 1/2	3	9 LBS
07	6 7/8	12	10	10 3/4	8 3/4	12 1/2	3	11 LBS
08	7 7/8	12	10	10 3/4	8 3/4	12 1/2	4	11 LBS
09	8 7/8	14	12 1/2	12 3/4	11 1/4	14 1/2	4	15 LBS
10	9 7/8	14	12 1/2	12 3/4	11 1/4	14 1/2	4	15 LBS
12	11 7/8	16	15	14 3/4	13 3/4	18 1/2	5 1/2	19 LBS
14	13 7/8	20	17 1/2	18 3/4	16 1/4	18 1/2	5 1/2	23 LBS
16	15 7/8	24	17 1/2	22 3/4	16 1/4	18 1/2	6 1/2	28 LBS
24 x 16	24 x 16	38	18	38	18	30	5 7/16	79 LBS

NOTES:
- WEIGHTS ARE AN ESTIMATION AND WILL VARY BASED ON SELECTED OPTIONS, INSULATION TYPE, ETC.
- 36" CLEARANCE REQUIRED BY NEC FOR ELECTRICAL ENCLOSURES.
- 24 X 16 NOT ILLUSTRATED.
- ACCESS DOOR NOT AVAILABLE DUE TO SPACE CONSTRAINTS. IF ACCESS DOOR IS REQUIRED, EITHER XEZTA MUST BE ORDERED OR ACCESS DOOR MUST BE PROVIDED IN DUCT WORK BY OTHERS.

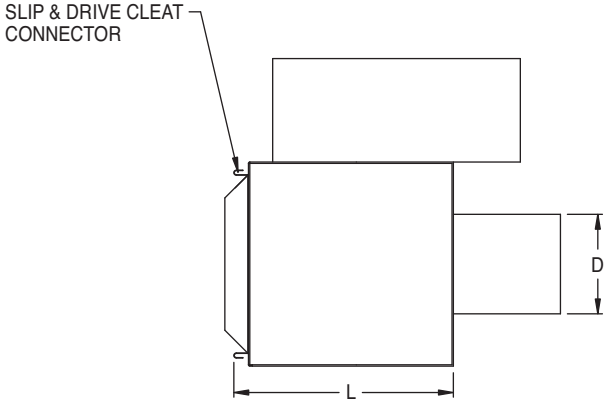

BOTTOM VIEW

All dimensions are in inches.

JOB NAME: **SUBMITTED BY:**

Product information is subject to change without notice.
Drawing is not to scale.

DWG# EZT-S-0024 7-1-15
Rev B