

SUBMITTAL SHEET

www.anemostat-hvac.com

Architectural Linear Slot Diffusers

Plaster - Mud Frame / Border

2-1/2" Slot Width

PRODUCT FEATURES

- Pattern / volume controllers field adjusted for horizontal to vertical air discharge directions
- Diffuser lengths can be ordered in 1/32" increments
- Diffuser end caps factory attached & tap onto diffuser ends
- Continuous run applications use multiple diffusers using alignment strips in keyways (included if applicable)
- Includes plenum mounting brackets and screws
- See **Model AD** Air Distribution plenums engineered for use with this diffuser (optional)

CONSTRUCTION DETAILS

- Extruded aluminum, adjustable linear slot diffuser


Finish:

- ☐ Black outer frames & volume / pattern controllers, white center T's
- ☐ Optional Anemostat Color _____
- ☐ Custom Color Match _____

MODELS

☐ **FFBF-250** **Supply**
☐ **FFRBF-250** **Return**


(Return model excludes Volume / Pattern Controllers)

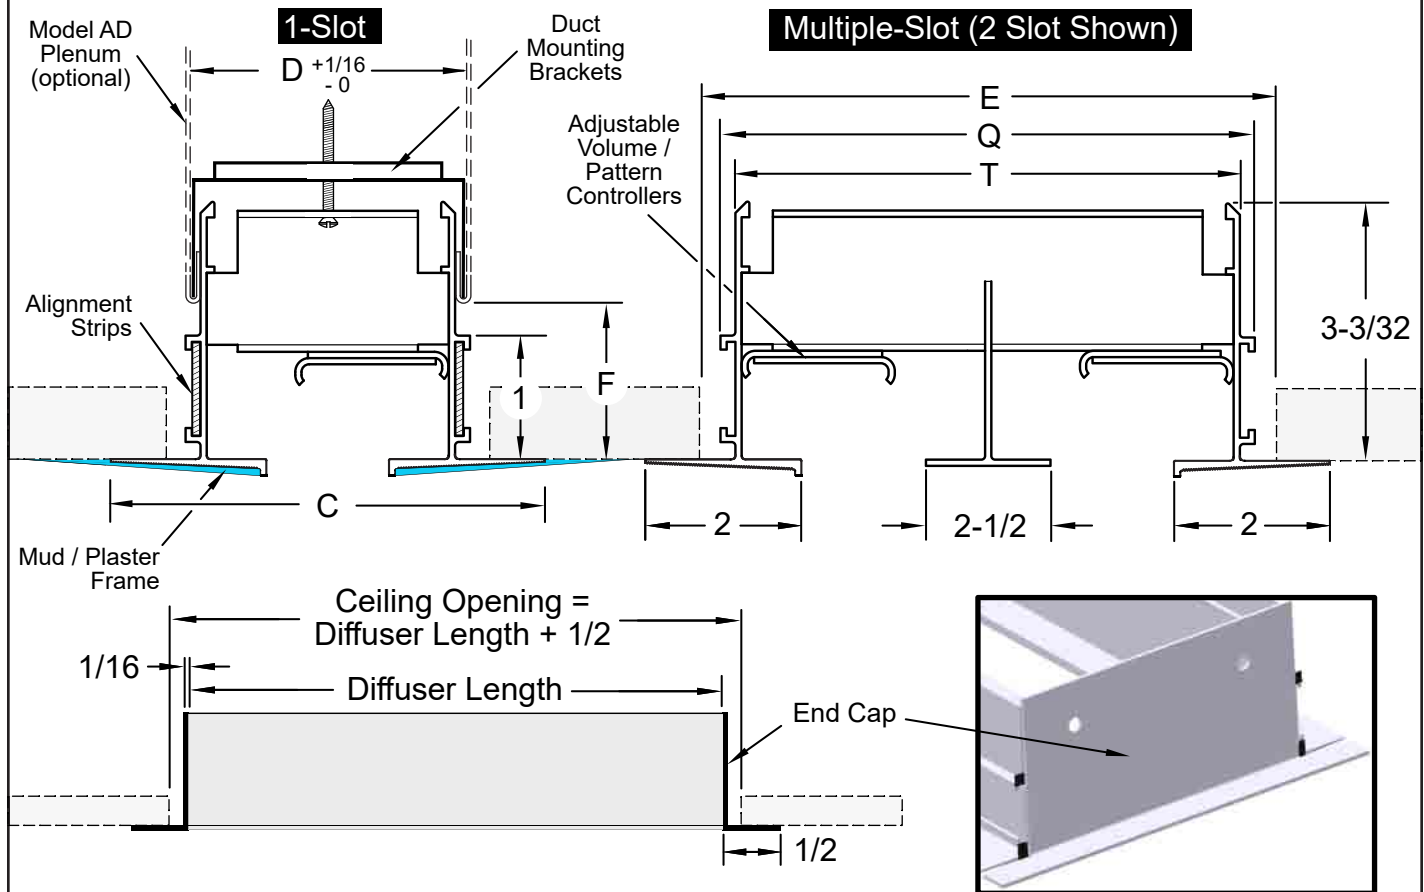

- Diffuser Length = Order Size and is actual cut length of linear diffuser (excludes end caps)
- End caps can be added or removed from the diffuser in the field
- Model AD Plenum Order Length = Model FFBF Order Length

All dimensions are in inches.

Models	Slot Width	# of Slots	E Ceiling Opening	C	D	T	Q	F Range
FFBF-250	2-1/2	1	5-3/8	6-1/2	5-5/16	5-1/16	5-11/32	2-1/4 to 2-5/8
FFRBF-250		2	10-3/8	11-1/2	10-5/16	10-1/16	10-11/32	


 Recommended Hem Detail
 (Duct must be hemmed to use mounting brackets)

JOB NAME:

SUBMITTED BY: