

PRODUCT FEATURES

- Minimum Panel Size:
12" x 12"
- Maximum Single Panel Size:
60" x 96"

CONSTRUCTION FEATURES

Material:

Extruded Aluminum 6063-T6/T52 Alloy


- .081" (nominal)
- .125" (nominal)

Face of Louver: Full Width Sill With Head and Blades Contained Within Jambs.
Approximate Blade Centers 3-1/2".



Screen: (When Indicated, in a Removable Frame)

- Bird Screen - 1/2" Flattened Aluminum, .051" Thk.
- 1/2" Sq. Mesh Intermediate Double-Crimped Aluminum Wire, .063" Dia.
- 18/16 Mesh, .011" Dia. Aluminum Wire Insect Screen.

Finish: _____

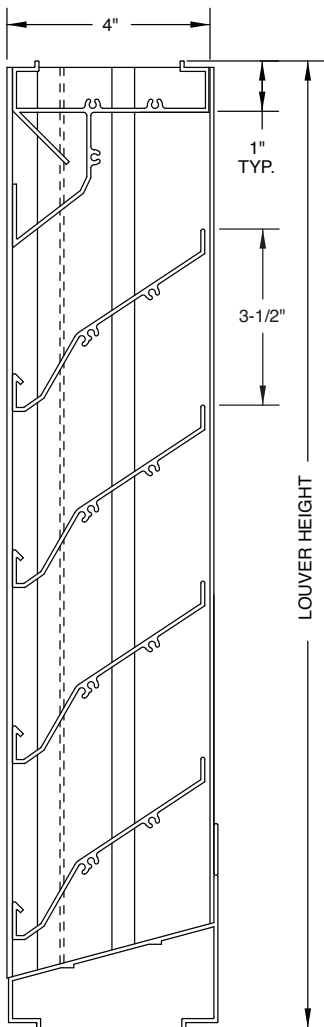

NOT TO SCALE

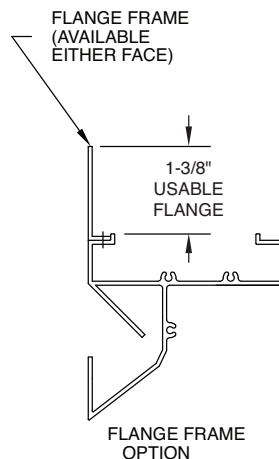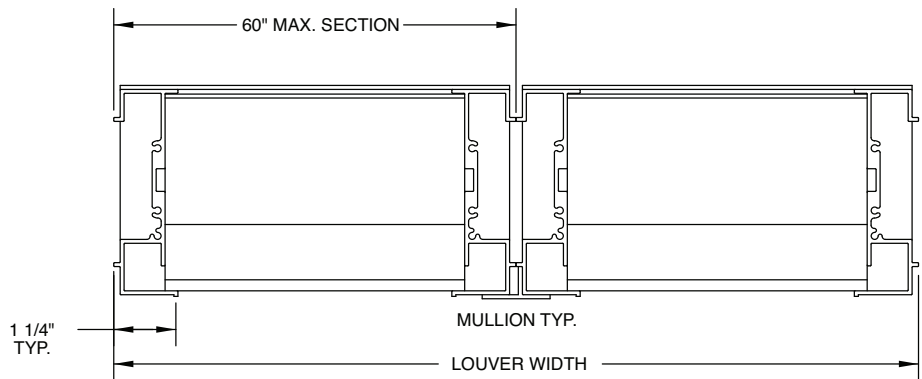

All dimensions are in inches.

JOB NAME:



SUBMITTED BY:

PERFORMANCE DATA

EXCELLENT WEATHER PROTECTION WITH LITTLE PRESSURE LOSS.

TESTS OF A 48" X 48" SAMPLE BY AN *AMCA ACCREDITED LABORATORY ACCORDING TO AMCA STANDARD 500 SHOWS LOW WATER PENETRATION. TESTS SHOW LESS THAN .02 OZ. PER SQ. FT. WATER PENETRATION AT 905 FPM (FREE AREA VELOCITY) WITH LESS THAN .12" W.G. PRESSURE DROP (INTAKE).

RATINGS DO NOT INCLUDE THE EFFECT OF BIRDSCREEN.

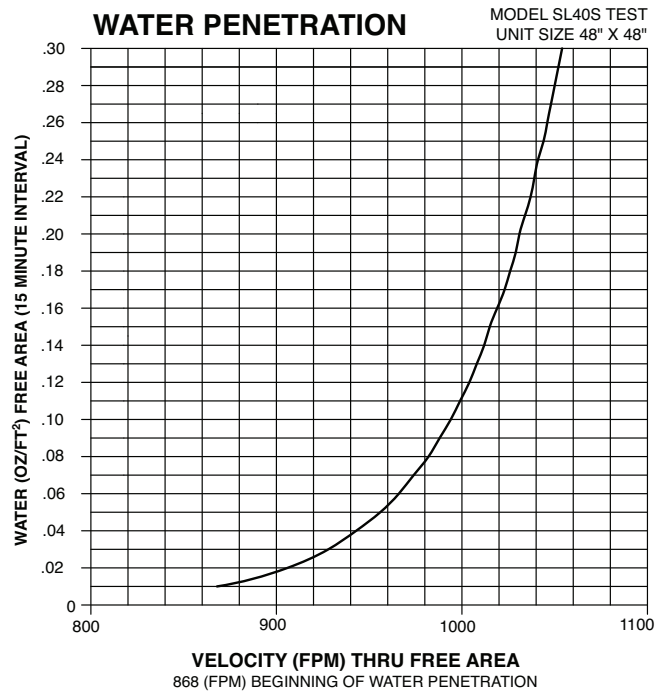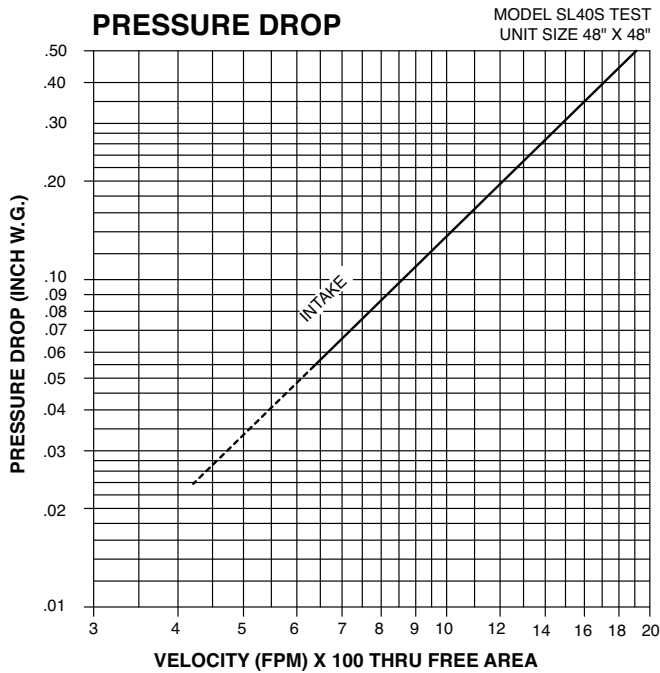

FREE AREA (SQ. FT.)

WIDTH

	12"	18"	24"	30"	36"	42"	48"	54"	60"
12"	.33	.53	.74	.95	1.16	1.36	1.57	1.77	1.98
24"	.80	1.30	1.81	2.31	2.82	3.32	3.82	4.33	4.83
36"	1.26	2.05	2.84	3.64	4.43	5.23	6.02	6.81	7.61
48"	1.84	3.00	4.16	5.32	6.48	7.64	9.07	9.97	11.13
60"	2.25	3.68	5.10	6.52	7.95	9.37	10.79	12.21	13.64
72"	2.83	4.62	6.41	8.20	9.99	11.78	13.57	15.36	17.15
84"	3.29	5.37	7.45	9.53	11.61	13.69	15.77	17.85	19.93
96"	3.82	6.23	8.64	11.05	13.47	15.88	18.29	20.70	23.11

HEIGHT



WATER PENETRATION



AIR PERFORMANCE

Anemostat certifies that the performance data shown has been determined by test in accordance with applicable AMCA standards.

All dimensions are in inches.

JOB NAME:

SUBMITTED BY: