

SUBMITTAL SHEET

www.anemostat-hvac.com

PRODUCT FEATURES

- Perforated face is 13% open, and removable via 1/4 turn fasteners for cleaning
- Face is hinged/removable and swings down 90° for easy cleaning. Safety cables prevent face from accidentally swinging down.
- Integral hanger brackets
- Balancing damper adjustable from panel face through hole with removable plug
- Closed cell gasket prevents leakage around face


MATERIAL AND FINISH

Distribution Panel:


- Steel with White Baked Epoxy
- Aluminum with White Baked Epoxy
- 304 Stainless Steel, #4 Polish
- 304 Stainless Steel with White Baked Epoxy

Dual Chamber Plenum:

- Steel with White Baked Epoxy
- Aluminum with White Baked Epoxy
- 304 Stainless Steel, 2B Mill Finish
- 304 Stainless Steel with White Baked Epoxy

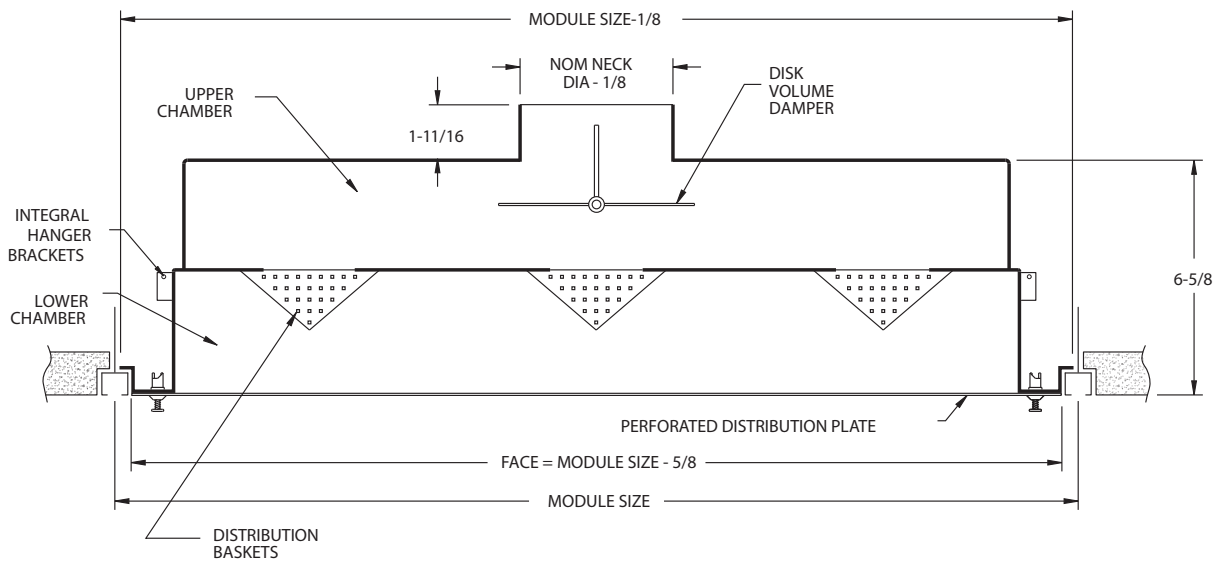

EDGE DETAIL

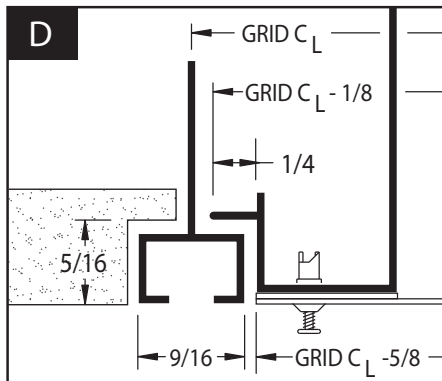

PANEL DIMENSIONS		
Size	Nom. Size	Max Neck Size
122	12 x 24	8" DIA
123	12 x 36	
124	12 x 48	
125	12 x 60	
126	12 x 72	
242	24 x 24	16" DIA
243	24 x 36	
244	24 x 48	
245	24 x 60	
246	24 x 72	
363	36 x 36	16" DIA
364	36 x 48	
365	36 x 60	
366	36 x 72	

All dimensions are in inches.

JOB NAME:

SUBMITTED BY: