

SUBMITTAL SHEET

www.anemostat-hvac.com

PRODUCT FEATURES

- Steps line voltage down to 24vac needed to power PvV diffusers and controller.
- The module is configured for line voltage available (120,208,240,277vac – single phase) & required VA for diffusers and accessories.
- Includes (2) Female RJ-12 ports to power daisy-chained diffusers.
- Interconnecting cables are ordered separately.

PRIMARY VOLTAGE (1Ø)


- 120 VAC
- 208 VAC
- 240 VAC
- 277 VAC
- Disconnect Switch

SECONDARY VA

- 40 VA
- 75 VA



WIRING DIAGRAM

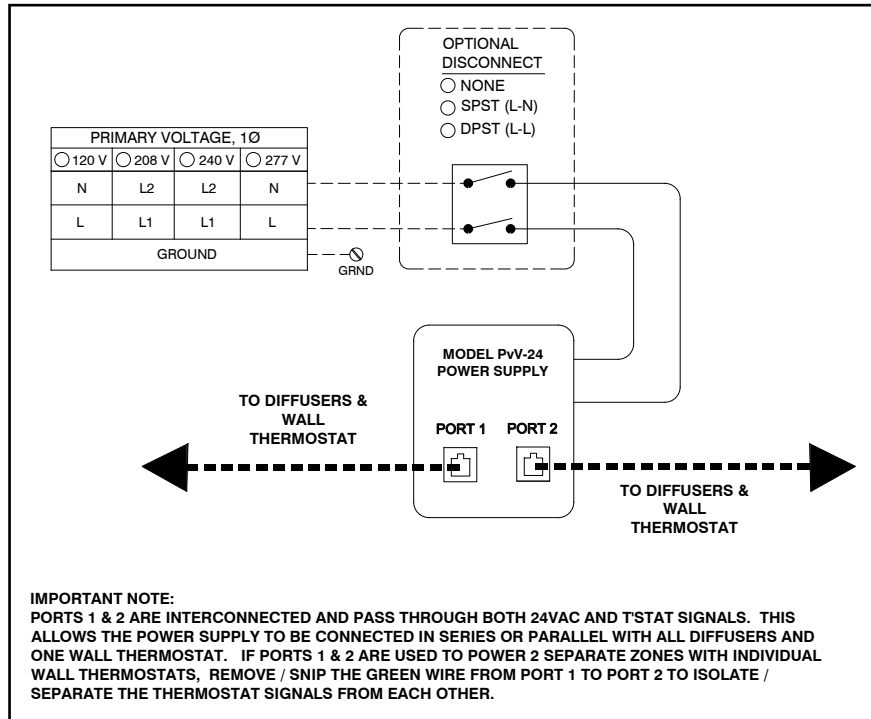

All dimensions are in inches.

JOB NAME:

SUBMITTED BY: