



Anemostat®

SECURITY AIR DISTRIBUTION


Model **QC-MS**

**SECURITY MODULAR CORE
DIFFUSER**

SUBMITTAL SHEET

www.anemostat-hvac.com


**SURFACE APPLICATION WITH REAR
MOUNTING FRAME (FM)**

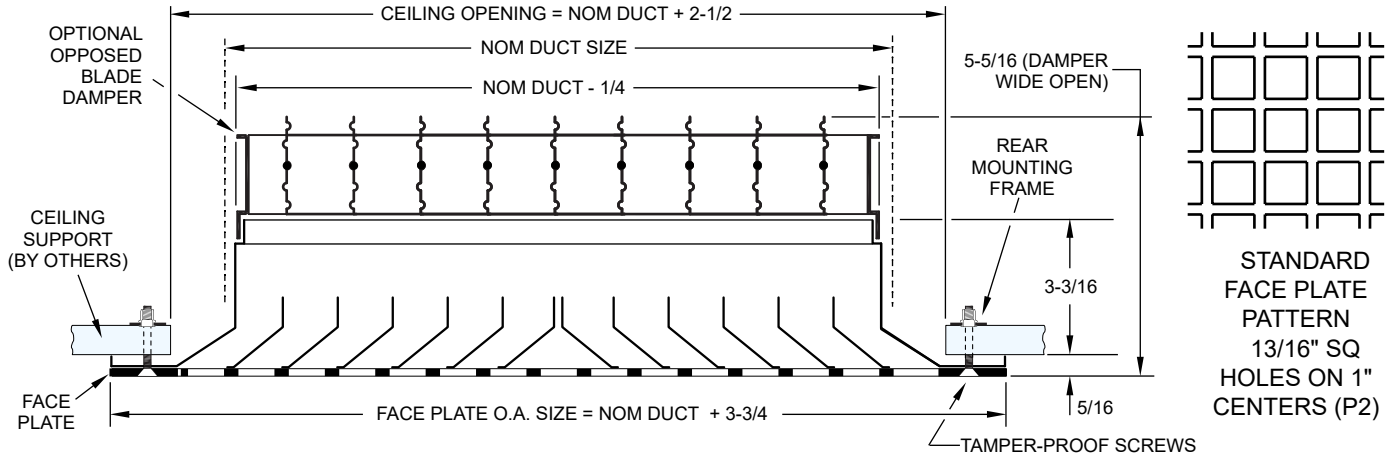

DUCT SIZES	
06 x 06	16 x 16
08 x 08	18 x 18
10 x 10	20 x 20
12 x 12	22 x 22
14 x 14	24 x 24

CORE PATTERNS (FIELD CONFIGURABLE)

Note diffuser ships with 4-Way Pattern / Square duct sizes only

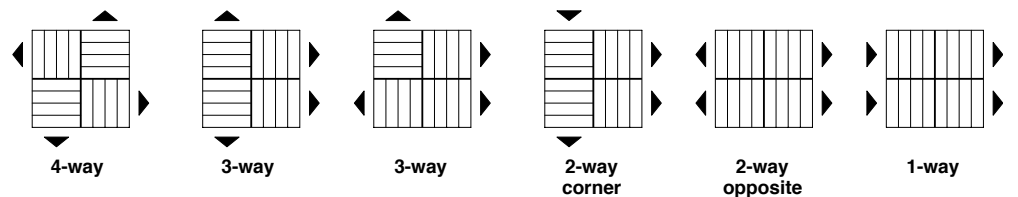

IMPORTANT: It is the specifier's responsibility to properly configure the HVAC system to meet the appropriate level of comfort, safety, security and detention

PRODUCT FEATURES

All dimensions are in inches.

Face Plate Thickness

- ☐ 12 GA. (STANDARD)
☐ 10 GA. ☐ 14 GA.
☐ Other _____

Perforated Hole Pattern

- ☐ (P2) 13/16" Sq. Holes on 1" Centers (STD)
☐ (P1) 9/16" Sq. Holes on 11/16" Centers
☐ (P8) 1/4" Dia. Holes on 3/8" Staggered Ctrs
☐ (P9) 5/16" Dia. Holes on 7/16" Staggered Ctrs
☐ Other _____

Face Material

- ☐ Plain Steel (STANDARD)
☐ 304 Stainless Steel* ☐ 316 Stainless Steel*
☐ Aluminum* ☐ Galvanized*
☐ Other _____

*(Consult factory for availability)

Rear Mounting Frame

- ☐ 16 Ga Galvanized Steel with Threaded Nutserts / Rivnuts (STANDARD)
☐ Other _____

Finish

- ☐ White Powder Coat (STANDARD)
☐ Rust-Inhibiting Primer
☐ Other _____

Tamper-Proof Screws

- ☐ 1/4-20 x 2" Pinned Flat Head Torx Machine Screws (STANDARD)
☐ No Screw Holes or Screws / No Rear Frame
☐ Other _____

OPTIONAL ACCESSORIES

- ☐ Model OB-1 Opposed Blade Damper - Front Operated, Attached (requires hole drilled in core for damper access)
☐ Model OB-1 Opposed Blade Damper - (Ships Loose)
☐ Model SRA Square to Round Duct (ships loose)
☐ Other Options (please specify) _____

Q T Y	Order Size (NOM DUCT SIZE)	
	W	H

JOB NAME:

SUBMITTED BY: