
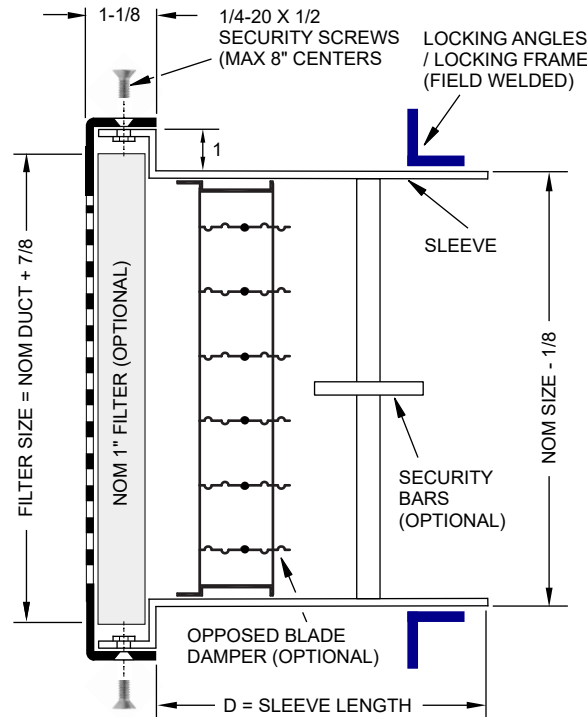


LIGATURE RESISTANT SECURITY FILTER GRILLE

**CALIFORNIA TITLE 24 & NATIONAL
INSTITUTE OF CORRECTIONS COMPLIANT**

www.anemostat-hvac.com

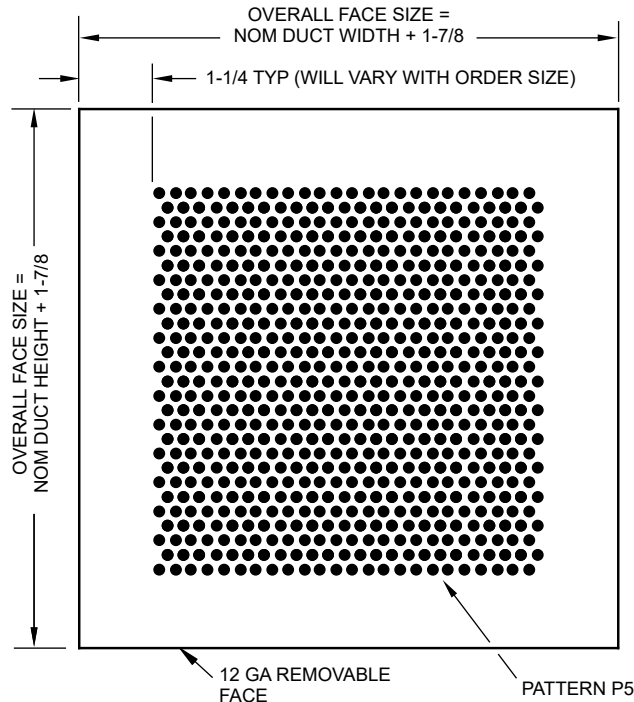

IMPORTANT: It is the specifier's responsibility to properly configure the HVAC system to meet the appropriate level of comfort, safety, security and detention

PRODUCT FEATURES

All dimensions are in inches.

Removable Face Plate

(P5) 5/32" Dia. Holes on 7/32" Stg. Ctrs (STD)

12 GA Steel (STD)

Sleeve Thickness

☐ 12 GA. (STD) ☐ 10 GA. ☐ 3/16"

☐ Other

Material

☐ **Plain Steel (STANDARD)**

☐ 304 Stainless Steel* ☐ 316 Stainless Steel*

☐ Aluminum* ☐ Galvanized*

☐ Other

*(Consult factory for availability)

Finish

☐ **White Powder Coat (STANDARD)**
☐ Rust-Inhibiting Primer
☐ Other

Tamper-Proof Screws

☐ #1/4-20 x 1/2" Pinned Flat Head Torx Machine Screws (STANDARD)

☐ Other _____

Locking Angle (2 Pieces)

☐ 1" x 1" x 3/16" (STANDARD)
☐ 1-1/2" x 1-1/2" x 3/16"
☐ 2" x 2" x 3/16"
☐ Other

Locking Frame

☐ 1" x 1" x 3/16" (Optional)
☐ Other _____

OPTIONAL ACCESSORIES

Model OB-1 Opposed Blade Damper

☐ Front Operated ☐ Rear Operated

☐ Security Bars in Sleeve (see detail sheet)

☐ SRA Square to Round Adapter (ships loose)

☐ Nelson Studs 3" x 3/8" Dia (see detail sheet)

☐ 1" Filter (Fire Retarding)

☐ Other Options (please specify)

[illegible]**JOB NAME:**

SUBMITTED BY: