


LIGATURE RESISTANT SECURITY FILTER GRILLE

CALIFORNIA TITLE 24 & NATIONAL INSTITUTE OF CORRECTIONS COMPLIANT

www.anemostat-hvac.com

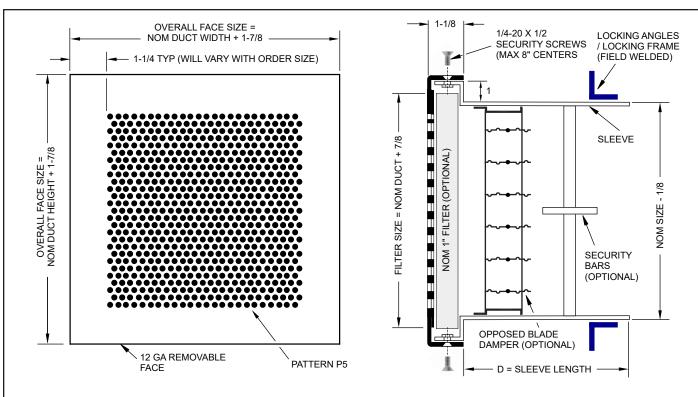

**IMPORTANT:** It is the specifier's responsibility to properly configure the HVAC system to meet the appropriate level of comfort, safety, security and detention

<b>IMPOHIANI:</b> It is the specifier's responsibility to properly configure the HVAC system to meet the appropriate level of comfort, safety, security and detention					
PRODUCT FEATURES	All dimensions are in inches.	Q	0	Order Size	
Removable Face Plate	Locking Angle (2 Pieces)	T (NOM DUCT S		ΓSIZE)	
(P5) 5/32" Dia. Holes on 7/32" Stg. Ctrs (STD)	☐ 1" x 1" x 3/16" (STANDARD) ☐ 1-1/2" x 1-1/2" x 3/16" ☐ 2" x 2" x 3/16" ☐ Other	Y	W	Н	D
3/16" (12 GA + 14 GA Welded Composite) (STD)  Sleeve Thickness					
☐ <b>12 GA. (STD)</b> ☐ 10 GA. ☐ 3/16" ☐ Other	Locking Frame				
Material ☐ Plain Steel (STANDARD)	☐ 1" x 1" x 3/16" (Optional) ☐ Other				
☐ 304 Stainless Steel* ☐ 316 Stainless Steel* ☐ Aluminum* ☐ Galvanized*	OPTIONAL ACCESSORIES				
Other	Model OB-1 Opposed Blade Damper ☐ Front Operated ☐ Rear Operated				
*(Consult factory for availability)  Finish	Security Bars in Sleeve (see detail sheet)				
	<ul><li>☐ SRA Square to Round Adapter (ships loose)</li><li>☐ Nelson Studs 3" x 3/8" Dia (see detail sheet)</li></ul>				
Other	<ul><li>☐ 1" Filter (Fire Retarding)</li><li>☐ Other Options (please specify)</li></ul>				
Tamper-Proof Screws  ☐ #1/4-20 x 1/2" Pinned Flat Head Torx					
Machine Screws (STANDARD)  ☐ Other					
JOB NAME:	SUBMITTED BY:				