


www.anemostat-hvac.com

## LIGATURE RESISTANT SECURITY GRILLE W/ REMOVABLE FACE

**CALIFORNIA TITLE 24 & NATIONAL** INSTITUTE OF CORRECTIONS COMPLIANT

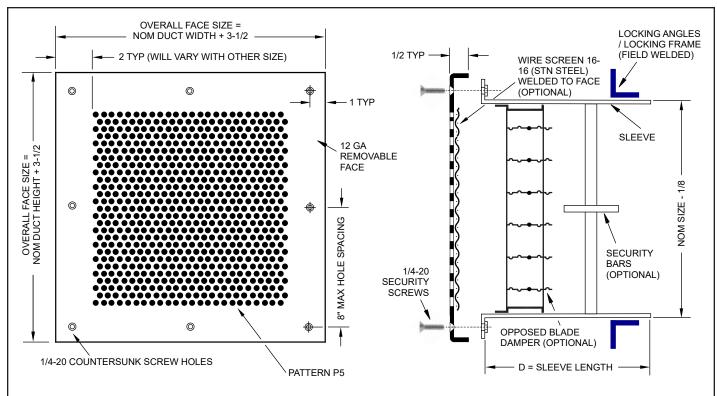

IMPORTANT: It is the specifier's responsibility to properly configure the HVAC system to meet the appropriate level of comfort, safety, security and detention					
PRODUCT FEATURES Removable Face Plate	All dimensions are in inches.	Q Order Size			
	Locking Angle (2 Pieces)	T	(NOM DUCT SIZE)		
(P5) 5/32" Dia. Holes on 7/32" Stg. Ctrs (STD)	1" x 1" x 3/16" (STANDARD)	Y	w	Н	D
12 GA Steel (STD)	1-1/2" x 1-1/2" x 3/16"		<b></b> -	<b></b>	
Sleeve Thickness	☐ 2" x 2" x 3/16"				
☐ <b>12 GA. (STD)</b> ☐ 10 GA. ☐ 3/16"	Other				
☐ Other	Locking Frame				1
<u>Material</u>	$\Box$ 1" x 1" x 3/16" (Optional)				
☐ Plain Steel (STANDARD)	Other				
☐ 304 Stainless Steel* ☐ 316 Stainless Steel*					
☐ Aluminum* ☐ Galvanized*	OPTIONAL ACCESSORIES				
Other	☐ Wire Screen (16-16 Stainless Steel)				
*(Consult factory for availability)	Model OB-1 Opposed Blade Damper				
Finish	☐ Front Operated ☐ Rear Operated				
─────────────────────────────────────	Security Bars in Sleeve (see detail sheet)				
Rust-Inhibiting Primer	SRA Square to Round Adapter (ships loose)				
☐ Other	Nelson Studs 3" x 3/8" Dia				
Tamper-Proof Screws	Other Options (please specify)				
#1/4-20 x 1/2" Pinned Flat Head Torx					
Machinge Screws (STANDARD)					
Other					
JOB NAME:	SUBMITTED BY:				