


www.anemostat-hvac.com

LIGATURE RESISTANT SECURITY GRILLE W/ REMOVABLE FACE

CALIFORNIA TITLE 24 & NATIONAL INSTITUTE OF CORRECTIONS COMPLIANT

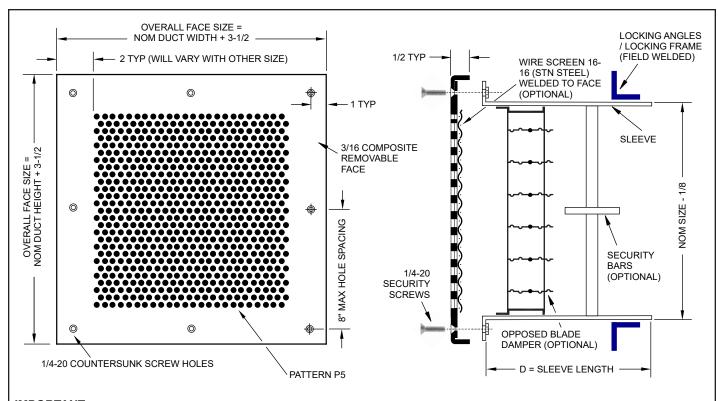

IMPORTANT: It is the specifier's responsibility to properly configure the HVAC system to meet the appropriate level of comfort, safety, security and detention

The CTTATT It is the specified a responsibility to properly configure the TTVAO system to meet the appropriate level of conflict, security and determion					
PRODUCT FEATURES	All dimensions are in inches.	Q Order Size			
Removable Face Plate	Locking Angle (2 Pieces)	T (NOM DUCT SIZ		SIZE)	
(P5) 5/32" Dia. Holes on 7/32" Stg. Ctrs (STD)	☐ 1" x 1" x 3/16" (STANDARD)	Υ	w	Н	D
3/16" (12 GA + 14 GA Welded Composite) (STD)	☐ 1-1/2" x 1-1/2" x 3/16"		**	11	
Sleeve Thickness	☐ 2" x 2" x 3/16"				
☐ 12 GA. (STD) ☐ 10 GA. ☐ 3/16"	Other				
U Other	Locking Frame				
<u>Material</u>	☐ 1" x 1" x 3/16" (Optional)				
☐ Plain Steel (STANDARD)	Other				
☐ 304 Stainless Steel* ☐ 316 Stainless Steel*					
☐ Aluminum* ☐ Galvanized*	OPTIONAL ACCESSORIES				
Other	☐ Wire Screen (16-16 Stainless Steel)				
*(Consult factory for availability)	Model OB-1 Opposed Blade Damper				
Finish	☐ Front Operated ☐ Rear Operated				
☐ White Powder Coat (STANDARD)	Security Bars in Sleeve (see detail sheet)				
☐ Rust-Inhibiting Primer	SRA Square to Round Adapter (ships loose)				
☐ Other	□ Nelson Studs 3" x 3/8" Dia				
Tamper-Proof Screws	Other Options (please specify)				
☐ #1/4-20 x 1/2" Pinned Flat Head Torx					
Machinge Screws (STANDARD)					
Other					
JOB NAME:	SUBMITTED BY:				