

**PRODUCT FEATURES**

- 1/2" (13) or 3/4" (19) Louver spacing
- Registers include a factory attached steel opposed blade volume control damper (aluminum damper available)
- Surface mounted holes in frame neatly countersunk for supplied #8 x 1-1/2" oval head screws

**CONSTRUCTION DETAILS**





- Material:**  
Steel Construction
- Finish:**
- Arctic White (std)
  - Custom Color (opt)

**Models**

- 30-0** 3/4" (19) Blade Spacing, 0° Deflection
- 30-45** 3/4" (19) Blade Spacing, 45° Deflection
- 35-0** 1/2" (13) Blade Spacing, 0° Deflection
- 35-45** 1/2" (13) Blade Spacing, 45° Deflection

**Accessories**

- OB** Opposed Blade Damper
- RC** Removable Core Frame

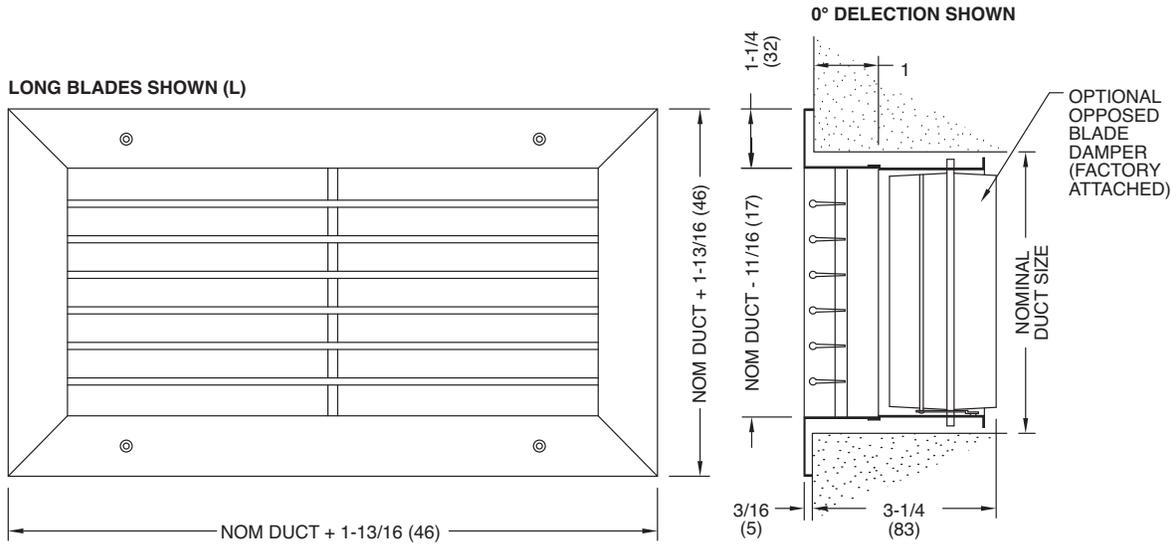

Dimensions in ( ) are millimeters

All dimensions are in inches.

**JOB NAME:**

**SUBMITTED BY:**