


SUBMITTAL SHEET

www.anemostat-hvac.com

MIN SECURITY ALUMINUM BAR GRILLE

SINGLE DEFLECTION

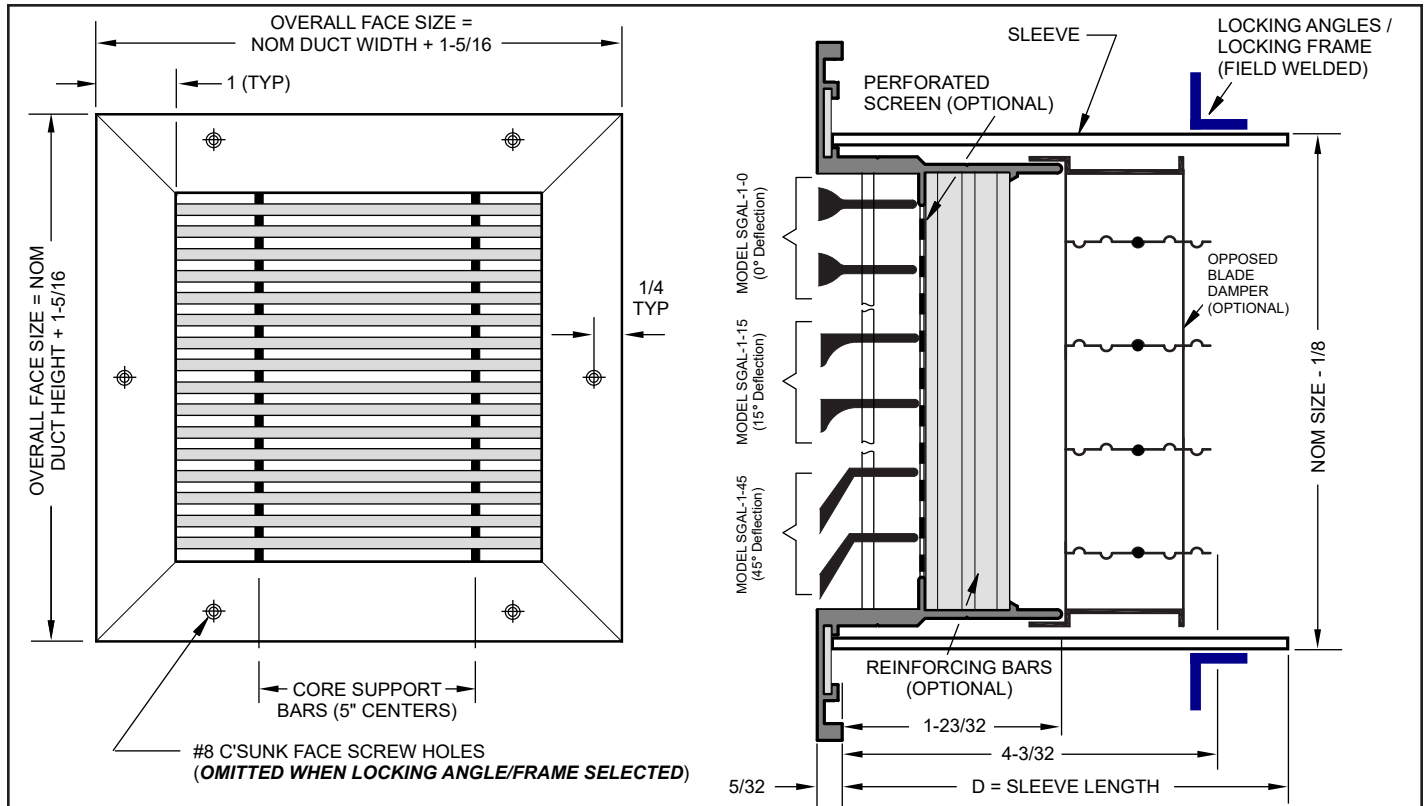

IMPORTANT: It is the specifier's responsibility to properly configure the HVAC system to meet the appropriate level of comfort, safety, security and detention

PRODUCT FEATURES

Model

- ☐ SGAL-1- 0 (0° Deflection)
☐ SGAL-1-15 (15° Deflection)
☐ SGAL-1-45 (45° Deflection)

Outer Frame

- ☐
- Heavy Gauge Aluminum Extrusion (STD)**

Sleeve

- ☐ 10 Ga Aluminum (Standard)
- ☐ Other

Tamper-Proof Screws

- ☐ #8 x 1-1/2" Pinned Flat Head Torx Sheet Metal Screws (STANDARD)
- ☐ None ☐ Other

Reinforcing Bars

- ☐ 1/4" x 5/8" I-Beams
☐ Other

Finish

- ☐
- White Powder Coat (STANDARD)**
-
- ☐
- Other

All dimensions are in inches.

Perforated Screen

- ☐ 14 Ga Alum (3/16" Dia Holes on 1/4" Stg Ctrs)
☐ Other

Locking Angle (2 Pieces)

- ☐ 1" x 1" x 3/16" (STANDARD)
☐ 1-1/2" x 1-1/2" x 3/16"
☐ 2" x 2" x 3/16"
☐ Other

Locking Frame

- ☐ 1" x 1" x 3/16" (Optional)
☐ Other

OPTIONAL ACCESSORIES

Model OB-1 Opposed Blade Damper

- ☐ Front Operated ☐ Rear Operated
☐ Model SRA Square to Round Duct
 (ships loose)
☐ Other Options (please specify)

[illegible]**JOB NAME:**

SUBMITTED BY: