

# SUBMITTAL SHEET





**Anemostat<sup>®</sup>**  
A MESTEK COMPANY

P.O. BOX 4938 • 1220 WATSONCENTER ROAD • CARSON, CA 90745-4206  
(310) 835-7500 • FAX (310) 835-0448  
e-mail: airsec@anemostat.com • website: www.anemostat.com

**AMSG**

MEDIUM SECURITY  
HEAVY DUTY GRILLE  
with STEEL WOVEN  
MESH FACE

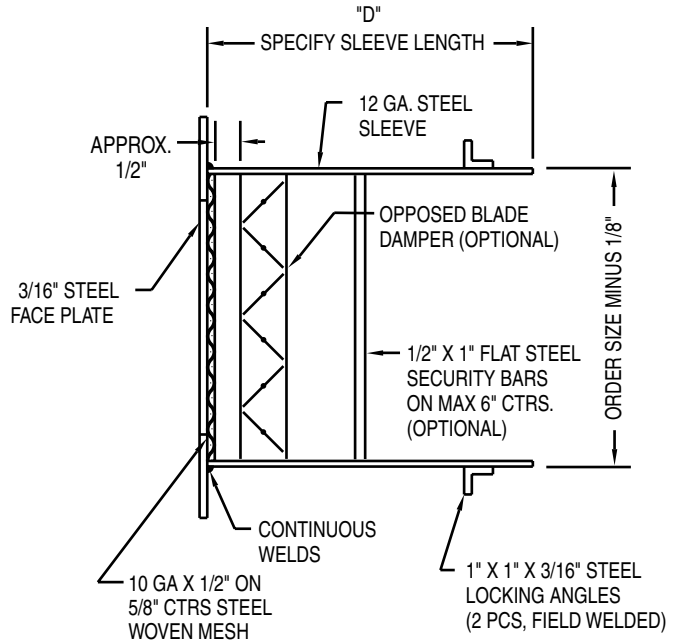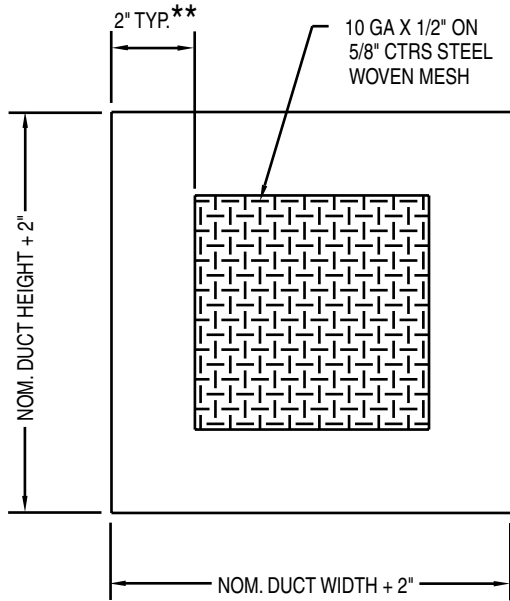

\*\* DIMENSION IS A FUNCTION OF SIZE AND PATTERN.

**IMPORTANT:** It is the specifier's responsibility to properly configure the HVAC system to meet the appropriate level of comfort, safety, security and detention

## PRODUCT FEATURES

### Face Plate

- 3/16" (standard)
- 10 GA. (optional)
- 12 GA. (optional)

### Steel Woven Mesh - 10 GA.

- with 1/2" sq. holes on 5/8" ctrs. (standard)
- with 3/8" sq. holes on 1/2" ctrs. (optional)

### Sleeve

- 12 GA. (standard)
- 3/16" (optional)
- 10 GA. (optional)
- Other \_\_\_\_\_

### Locking Angles (two pieces)

- 1" x 1" x 3/16" (standard)
- 1-1/2" x 1-1/2" x 3/16" (optional)
- 2" x 2" x 3/16" (optional)
- Other \_\_\_\_\_

### Material

- Cold Rolled Steel (standard)
- \*Stainless Steel (optional)
- \*Aluminum (optional)
- \*Galvanized (optional)
- Other \_\_\_\_\_

\*consult factory for availability

### Security Bars -(optional)

- 1/2" x 1" flat steel (max. 6" ctrs.)
- Other \_\_\_\_\_

### Opposed Blade Damper -(optional)

- Front Operated
- Rear Operated
- Other \_\_\_\_\_

### Anchoring Studs -(optional)

- Nelson Type (3" x 3/8")
- Other \_\_\_\_\_

### Locking Frame -(optional)

- 1" x 1" x 3/16" (field welded)
- Other \_\_\_\_\_

### Adapter -(optional)

- Square to round (shipped loose)

### Finish

- White Powder Coat (standard)
- Rust Inhibiting Prime Coat (optional)
- Other \_\_\_\_\_

### Other Options (please specify)

\_\_\_\_\_

Qty.	Order Size (Nominal Duct)		Sleeve Length
	W" x H"	D	

## SUBMITTAL APPROVAL

Job Name and Location			
Engineer	Date	Factory	Date
Mfr. Rep.	Date	Submitted By	Date