SUBMITTAL SHEET

Anemostat®
A MESTEK COMPANY
P.O. BOX 4938 • 1220 WATSONCENTER ROAD • CARSON, CA 90745-4206
(310) 835-7500 • FAX (310) 835-0448
e-mail: airsec@anemostat.com • website: www.anemostat.com

ASFP-RR

MINIMUM SECURITY

RISK RESISTANT
HEAVY DUTY STEEL
FACE PLATE

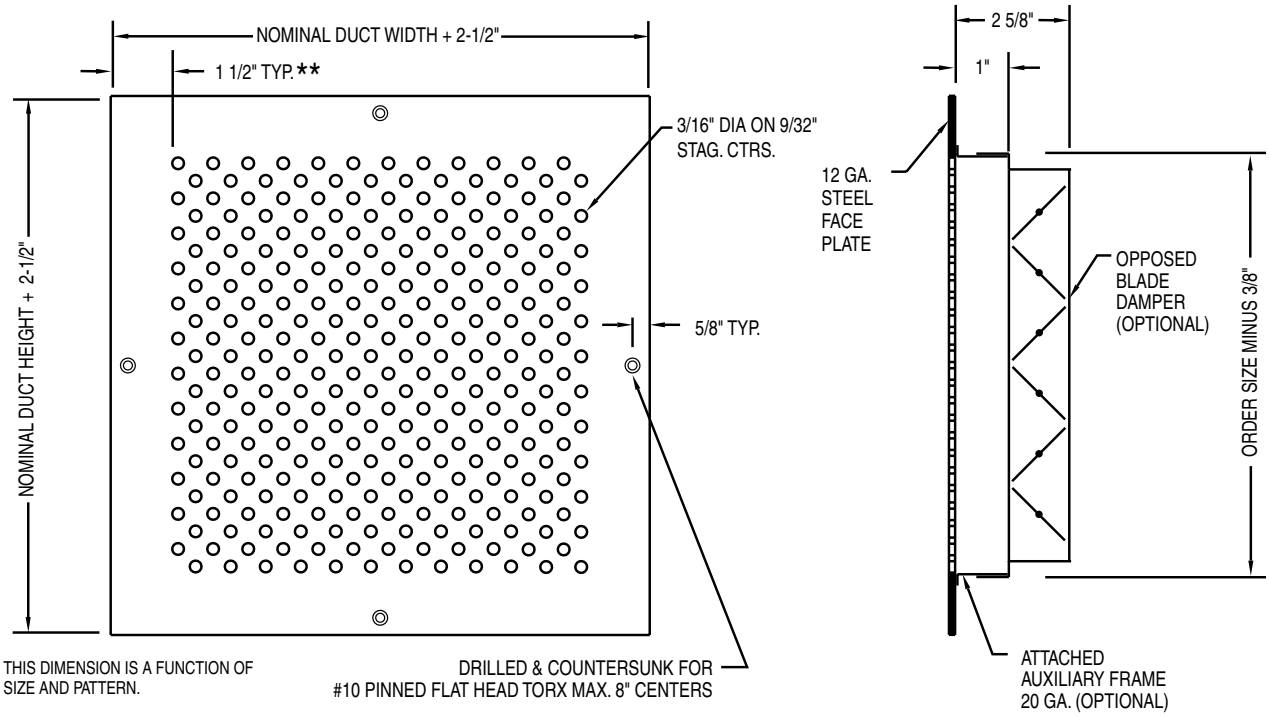

IMPORTANT: It is the specifier's responsibility to properly configure the HVAC system to meet the appropriate level of comfort, safety, security and detention

PRODUCT FEATURES

Face Plate

- ☐ 12 GA. **(standard)**
- ☐ 3/16" GA. (optional)
- ☐ 10 GA. (optional)
- ☐ 14 GA. (optional)
- ☐ Other _____

ASFP-RR Face Plate Patterns**

- ☐ 3/16" dia. holes on 9/32" ctrs. **(standard)**

Material

- ☐ Cold Rolled Steel **(standard)**
- ☐ *Stainless Steel (optional)
- ☐ *Aluminum (optional)
- ☐ *Galvanized (optional)
- ☐ Other _____

*consult factory for availability
**RR: Risk Resistant type

Tamperproof Screws

- ☐ #10 x 1-1/2" pinned flat head torx sheet metal screws **(standard)**
- ☐ #10 - 32 x 1-1/2" pinned flat head torx machine screws (optional)
- ☐ Other _____

Opposed Blade Damper -(optional)

- ☐ Front Operated
- ☐ Rear Operated
- ☐ Other _____

Auxiliary Frame -(optional)

- ☐ Attached - 20 GA. (standard when OB Damper is required)

Adapter -(optional)

- ☐ Square to round (shipped loose)

Finish

- ☐ White Powder Coat **(standard)**
- ☐ Rust Inhibiting Prime Coat (optional)
- ☐ Other _____

Other Options (please specify)

_____

_____

Qty.	Order Size (Nominal Duct) W"	x H"

SUBMITTAL APPROVAL

Job Name and Location			
Engineer	Date	Factory	Date
Mfr. Rep.	Date	Submitted By	Date