

SUBMITTAL SHEET





Anemostat®
A MESTEK COMPANY

P.O. BOX 4938 • 1220 WATSONCENTER ROAD • CARSON, CA 90745-4206
(310) 835-7500 • FAX (310) 835-0448
e-mail: airsec@anemostat.com • website: www.anemostat.com

ASSG

MAXIMUM SECURITY
EXTRA HEAVY DUTY
GRILLE with STEEL
PERFORATED FACE

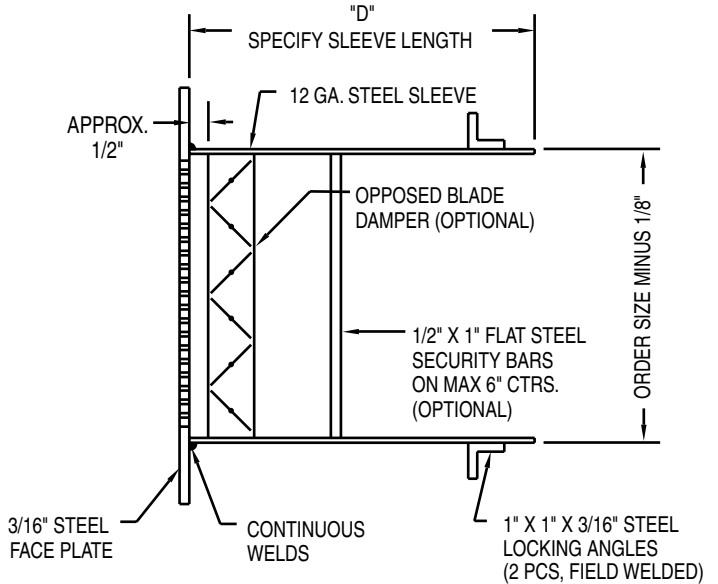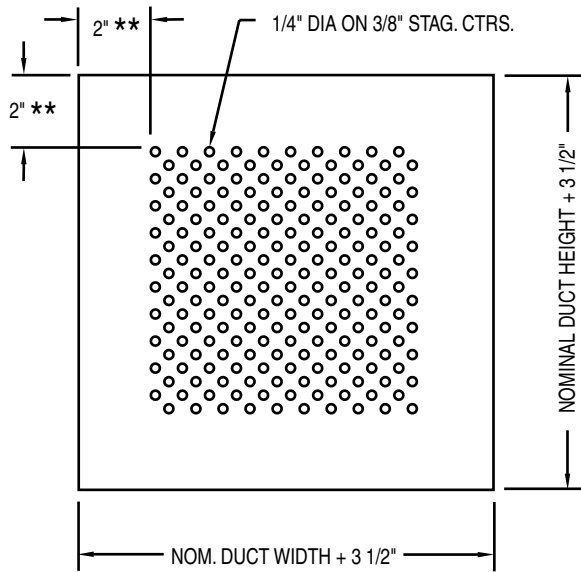

** 2" BORDER APPROXIMATE. THIS DIMENSION IS A FUNCTION OF SIZE AND PATTERN

IMPORTANT: It is the specifier's responsibility to properly configure the HVAC system to meet the appropriate level of comfort, safety, security and detention

PRODUCT FEATURES

Face Plate

- 3/16" (standard)
- 10 GA. (optional)
- 12 GA. (optional)
- Other _____

Face Plate Patterns

- 1/4" dia. holes on 3/8" stag. ctrs. (**std.**)
- 5/16" dia. holes on 7/16" stag. ctrs. (optional)
- 9/16" sq. on 11/16" ctrs. (optional)
- 13/16" sq. on 1" ctrs. (optional)
- Slotted - indicate type below (optional)
- _____

Sleeve

- 12 GA. (**standard**)
- 10 GA. (optional)
- 3/16" (optional)
- Other _____

Locking Angles (two pieces)

- 1" x 1" x 3/16" (**standard**)
- 1-1/2" x 1-1/2" x 3/16" (optional)
- 2" x 2" x 3/16" (optional)
- Other _____

Security Bars -(optional)

- 1/2" x 1" flat steel (max. 6" ctrs.)
- Other _____

Material

- Cold Rolled Steel (**standard**)
 - *Stainless Steel (optional)
 - *Aluminum (optional)
 - *Galvanized (optional)
 - Other _____
- *consult factory for availability

Opposed Blade Damper -(optional)

- Front Operated
- Rear Operated
- Other _____

Anchoring Studs -(optional)

- Nelson Type (3" x 3/8")
- Other _____

Locking Frame -(optional)

- 1" x 1" x 3/16" (field welded)
- Other _____

Adapter -(optional)

- Square to round (shipped loose)

Finish

- White Powder Coat (**standard**)
- Rust Inhibiting Prime Coat (optional)
- Other _____

Other Options (please specify)

Qty.	Order Size	Sleeve Length
	(Nominal Duct)	
	W" x H"	D

SUBMITTAL APPROVAL

Job Name and Location			
Engineer	Date	Factory	Date
Mfr. Rep.	Date	Submitted By	Date