



# SUBMITTAL SHEET



**Anemostat**  
A MESTEK COMPANY

P.O. BOX 4938 • 1220 WATSONCENTER ROAD • CARSON, CA 90745-4206  
(310) 835-7500 • FAX (310) 835-0448  
e-mail: airsec@anemostat.com • website: www.anemostat.com

**ASTG-RR**  
MAXIMUM SECURITY  
RISK RESISTANT  
EXTRA HEAVY DUTY  
GRILLE with STEEL  
PERFORATED FACE

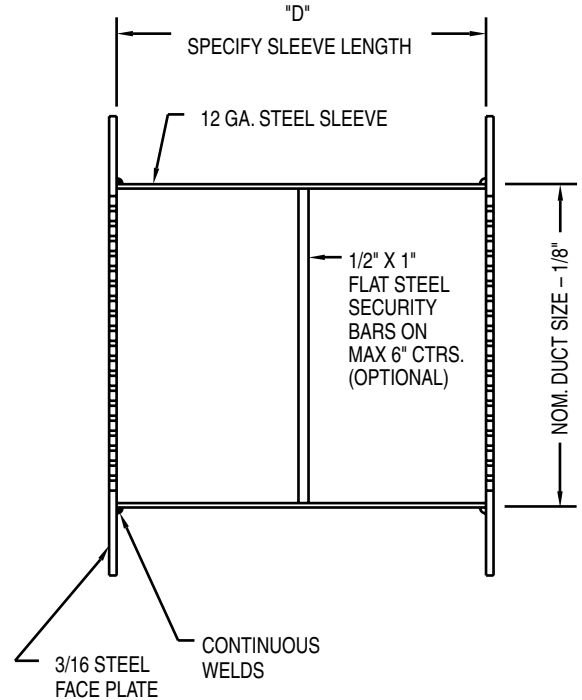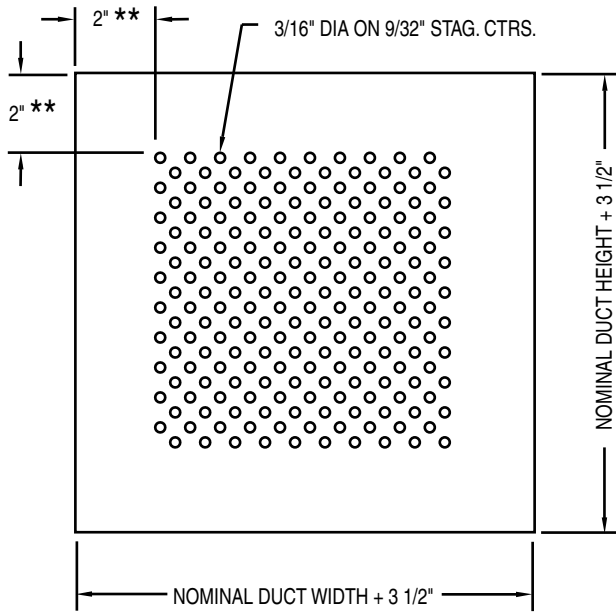

\*\* 2" BORDER APPROXIMATE. THIS DIMENSION IS A FUNCTION OF SIZE AND PATTERN

**IMPORTANT:** It is the specifier's responsibility to properly configure the HVAC system to meet the appropriate level of comfort, safety, security and detention

## PRODUCT FEATURES

### Face Plate

- 3/16" (standard)
- 10 GA. (optional)
- 12 GA. (optional)
- Other \_\_\_\_\_
- Removable with flanged sleeve (optional)

### Backer Plate

- 3/16" (standard)
- 10 GA. (optional)
- 12 GA. (optional)
- Other \_\_\_\_\_

### Material

- Cold Rolled Steel (standard)
- \*Stainless Steel (optional)
- \*Aluminum (optional)
- \*Galvanized (optional)
- Other \_\_\_\_\_

\*consult factory for availability

### ASTG-RR\*\* Face Plate Patterns

- 3/16" dia. holes on 9/32" stag. ctrs. (std.)

### Sleeve

- 12 GA. (standard)
- 10 GA. (optional)
- 3/16" (optional)
- Other \_\_\_\_\_

### Security Bars -(optional)

- 1/2" x 1" flat steel (max. 6" ctrs.)
- Other \_\_\_\_\_

### Anchoring Studs -(optional)

- Nelson Type (3" x 3/8")
- Other \_\_\_\_\_

### Finish

- White Powder Coat (standard)
- Rust Inhibiting Prime Coat (optional)
- Other \_\_\_\_\_

### Other Options (please specify)

\_\_\_\_\_  
\_\_\_\_\_

\*\*RR: Risk Resistant type

Qty.	Order Size (Nominal Duct)		Sleeve Length
	W" x H"	D	

## SUBMITTAL APPROVAL

Job Name and Location			
Engineer	Date	Factory	Date
Mfr. Rep.	Date	Submitted By	Date