


## Model EZTS Basic Assembly

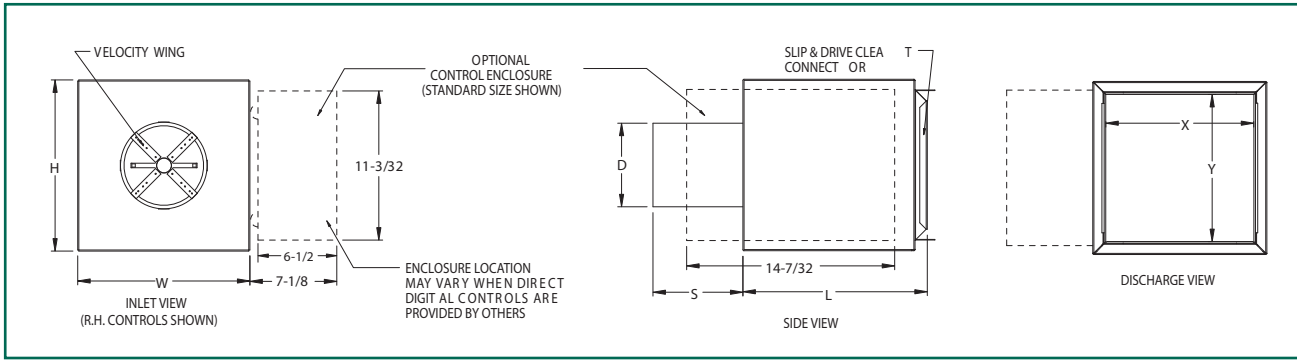


## EZTS Units

Inlet Size	Airflow Range (CFM)	(inches)							Weight (lbs)
		D	W	H	X	Y	L	S	
05	0 - 290	4 7/8	10	10	8 3/4	8 3/4	12 1/2	5 3/8	9
06	0 - 470	5 7/8	10	10	8 3/4	8 3/4	12 1/2	5 3/8	9
07	0 - 615	6 7/8	12	10	10 3/4	8 3/4	12 1/2	5 3/8	11
08	0 - 870	7 7/8	12	10	10 3/4	8 3/4	12 1/2	5 3/8	11
09	0 - 1100	8 7/8	14	12 1/2	12 3/4	11 1/4	14 1/2	5 3/8	15
10	0 - 1355	9 7/8	14	12 1/2	12 3/4	11 1/4	14 1/2	5 3/8	15
12	0 - 1800	11 7/8	16	15	14 3/4	13 3/4	18 1/2	5 3/8	19
14	0 - 2470	13 7/8	20	17 1/2	18 3/4	16 1/4	18 1/2	5 3/8	23
16	0 - 3370	15 7/8	24	17 1/2	22 3/4	16 1/4	18 1/2	5 3/8	28

1. Airflow range shown is for sensor dP=1.00". Consult controller specifications for actual Min to Max dP limits.
2. Control enclosure is optional on all units.
3. Weights are approximate and will vary based on selected options, insulation type, etc.
4. Control enclosures add approx 5 lbs to unit weight.
5. Right hand connections shown.




## Size 24 x 16

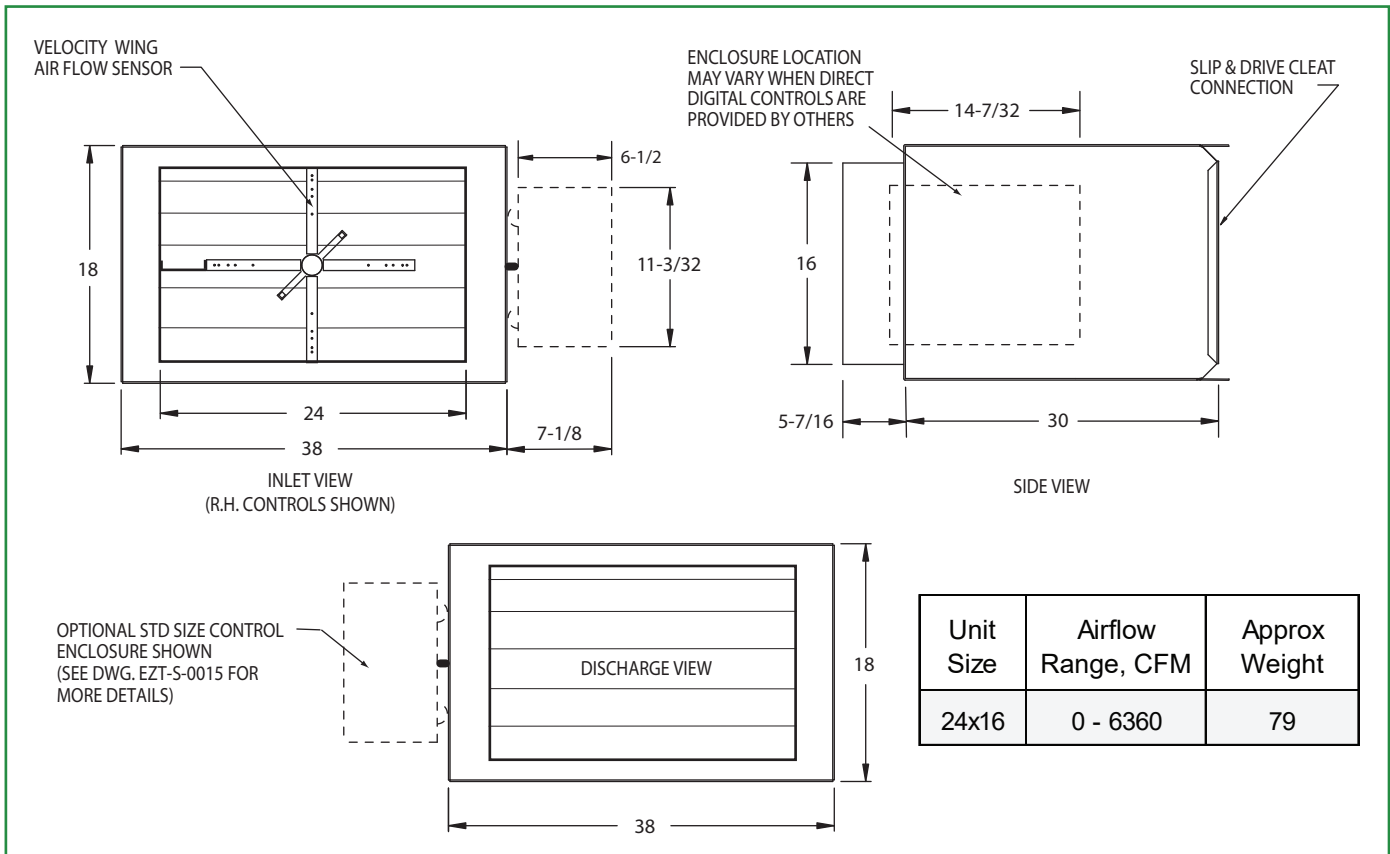

Unit Size	Airflow Range, CFM	Approx Weight
24x16	0 - 6360	79


## EZTS Units with Hot Water Heating Coil

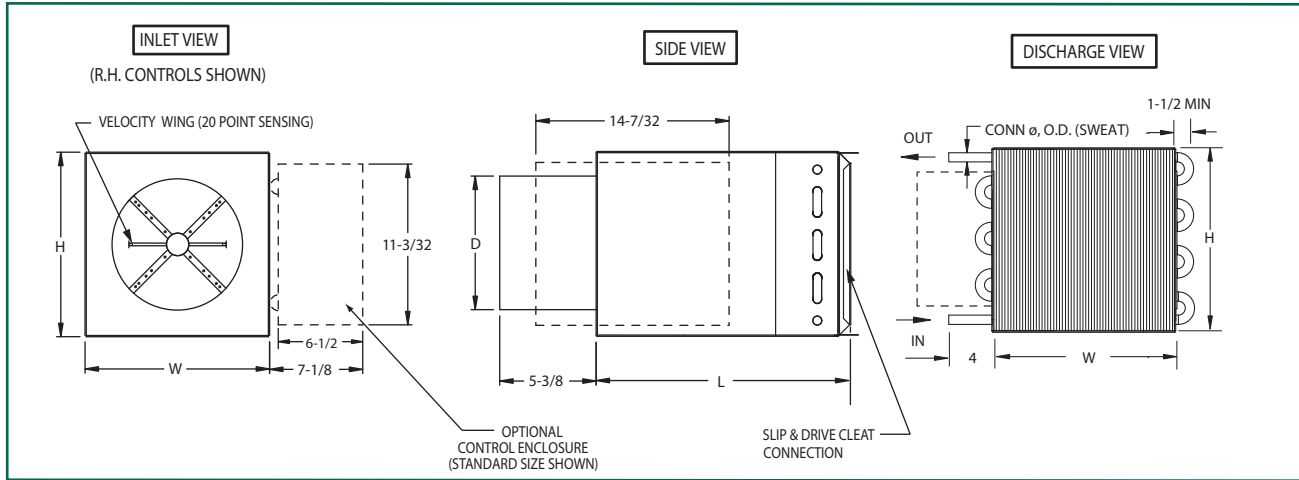

All dimensions are in inches.

Unit Size	Airflow Range, CFM	Inlet Dia D	W	H	1 Row Coil			2 Row Coil			3 Row Coil			4 Row Coil		
					L	Conn $\phi$ , O.D.	Approx Weight	L	Conn $\phi$ , O.D.	Approx Weight	L	Conn $\phi$ , O.D.	Approx Weight	L	Conn $\phi$ , O.D.	Approx Weight
05	0 - 290	4-7/8	10	10	15-5/8	1/2	25	16-11/16	1/2	27	17-3/4	7/8	30	19-5/16	7/8	33
06	0 - 470	5-7/8	10	10	15-5/8	1/2	25	16-11/16	1/2	27	17-3/4	7/8	30	19-5/16	7/8	33
07	0 - 615	6-7/8	12	10	15-5/8	1/2	27	16-11/16	1/2	30	17-3/4	7/8	34	19-5/16	7/8	37
08	0 - 870	7-7/8	12	10	15-5/8	1/2	27	16-11/16	1/2	30	17-3/4	7/8	34	19-5/16	7/8	37
09	0 - 1100	8-7/8	14	12-1/2	17-5/8	1/2	38	18-11/16	1/2	41	19-3/4	7/8	47	21-5/16	7/8	52
10	0 - 1355	9-7/8	14	12-1/2	17-5/8	1/2	38	18-11/16	1/2	41	19-3/4	7/8	47	21-5/16	7/8	52
12	0 - 1800	11-7/8	16	15	21-5/8	7/8	45	22-11/16	1/2	49	23-3/4	7/8	56	25-5/16	7/8	63
14	0 - 2470	13-7/8	20	17-1/2	21-5/8	7/8	54	22-11/16	7/8	61	23-3/4	7/8	69	24-13/16	7/8	78
16	0 - 3370	15-7/8	24	17-1/2	21-5/8	7/8	64	22-11/16	7/8	72	23-3/4	7/8	82	24-13/16	7/8	93

### SIZE 24 X 16

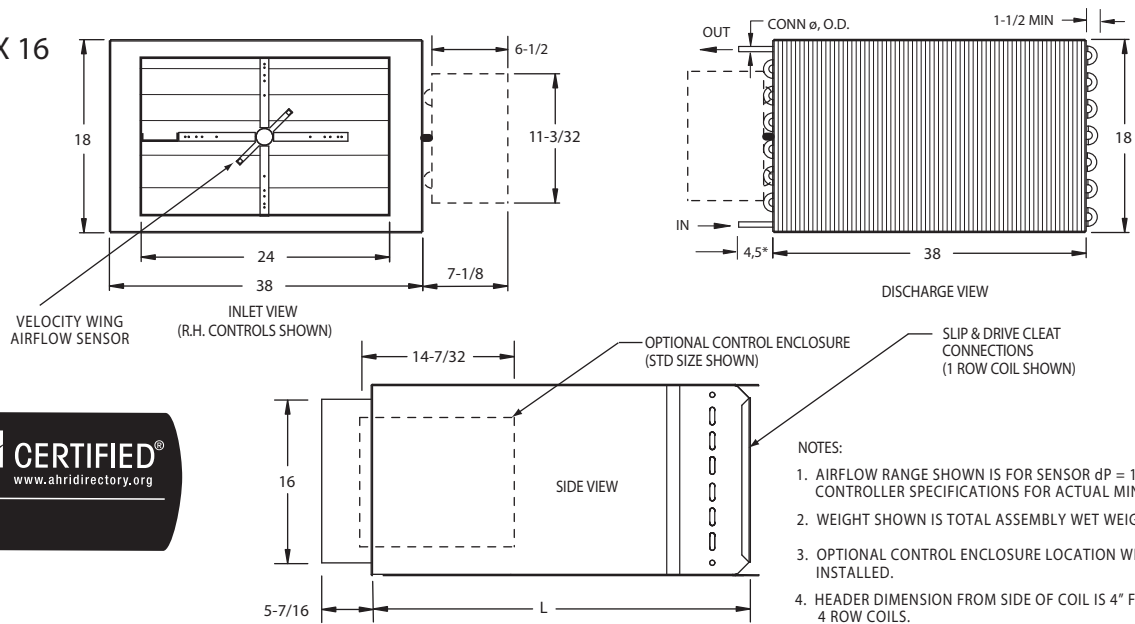

- NOTES:
- AIRFLOW RANGE SHOWN IS FOR SENSOR  $dP = 1.00"$ . CONSULT VAV CONTROLLER SPECIFICATIONS FOR ACTUAL MIN AND MAX  $dP$  LIMITS.
  - WEIGHT SHOWN IS TOTAL ASSEMBLY WET WEIGHT IN LBS (8.3 LBS / GALLON)
  - OPTIONAL CONTROL ENCLOSURE LOCATION WILL VARY BASED ON CONTROLS INSTALLED.
  - HEADER DIMENSION FROM SIDE OF COIL IS 4" FOR 1, 2 ROW, AND 5" FOR 3, 4 ROW COILS.

All dimensions are in inches.

Unit Size	Airflow Range, CFM	1 Row Coil			2 Row Coil			3 Row Coil			4 Row Coil		
		L	Conn $\phi$ , O.D.	Approx Weight	L	Conn $\phi$ , O.D.	Approx Weight	L	Conn $\phi$ , O.D.	Approx Weight	L	Conn $\phi$ , O.D.	Approx Weight
24x16	0 - 6360	35	7/8	124	35	7/8	136	36	1-1/8	153	36	1-1/8	169