


**HOT WATER HEAT**

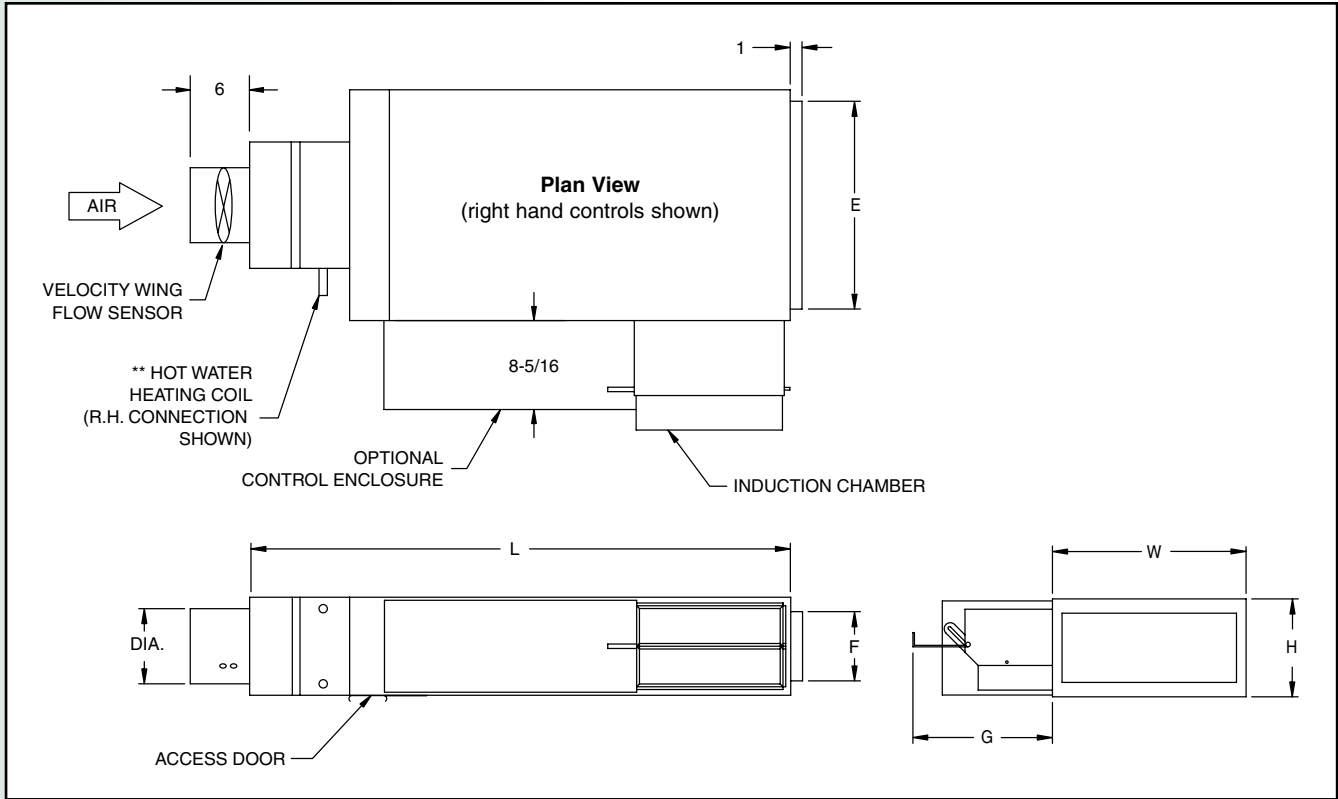

SIZE	CFM *	DIA.	W	H	L		E	F	G	COIL STUB (O.D.)	
					1 ROW	2 ROW				1 ROW	2 ROW
5	100-285	5	18	10	53-1/4	54-5/16	15	7	10-1/4	1/2	1/2
6	100-470	6	18	10	53-1/4	54-5/16	15	7	10-1/4	1/2	1/2
7	200-610	7	26	10	53-1/4	54-5/16	23	7	10-1/4	1/2	1/2
8	200-865	8	26	10	53-1/4	54-5/16	23	7	10-1/4	1/2	1/2
9	300-1100	9	34	12-1/2	58-1/4	59-5/16	31	8	11-1/4	1/2	1/2
10	300-1355	10	34	12-1/2	58-1/4	59-5/16	31	8	11-1/4	1/2	1/2
12	400-1800	12	40	17-1/2	72-1/4	73-5/16	33	12	13-1/4	7/8	7/8
14	430-2470	14	40	17-1/2	72-1/4	73-5/16	37	12	13-1/4	7/8	7/8

\* BOTH THE MAXIMUM AND THE MINIMUM MUST BE CHOSEN WITHIN THE CFM RANGE SHOWN IN CHART. AIR FLOW CONTROL BELOW THE RANGE IS GREATLY REDUCED. THEREFORE, FACTORY SETTINGS WILL NOT BE MADE IN THIS RANGE.

\*\* 4 ROW AVAILABLE - CONTACT FACTORY FOR DETAILS