## SUBMITTAL SHEET



P.O. BOX 4938 • 1220 WATSONCENTER ROAD • CARSON, CA 90745-4206 (310) 835-7500 • FAX (310) 835-0448


e-mail: airsec@anemostat.com • website: www.anemostat.com

## RRFG

MAXIMUM SECURITY

EXTRA HEAVY DUTY FILTER
GRILLE with REMOVABLE
STEEL PERFORATED
FACE PLATE(S)

RRFG-1/RRFG-2

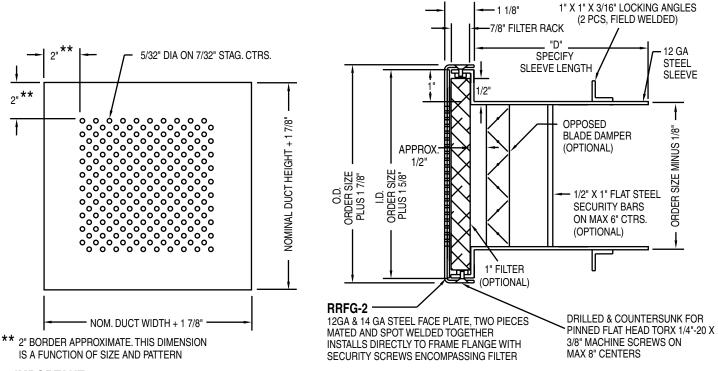

IMPORTANT: It is the specifier's responsibility to properly configure the HVAC system to meet the appropriate level of comfort, safety, security and detention

PRODUCT FEATURES					
Face Plate	Security Bars -(optional)	Otre	Order Size (Nominal Duct)		Sleeve Length
RRFG-1: 12 GA. (standard)	☐ 1/2" x 1" flat steel (max. 6" ctrs.)	Qty.		· H"	D
with 5/32" dia. holes on 7/32" stag. ctrs.	Other		VV >	П	U
RRFG-2: 12 GA./14 GA. = 3/16" (std)	Opposed Blade Damper -(optional)				
Sleeve	☐ Front Operated				
☐ 12 GA. <b>(standard)</b> ☐ 3/16" (optional)	Rear Operated				
☐ 10 GA. (optional) ☐ Other	☐ Other				
Locking Angles (two pieces)	Anchoring Studs -(optional)				
☐ 1" x 1" x 3/16" (standard)	☐ Nelson Type (3" x 3/8")				
☐ 1-1/2" x 1-1/2" x 3/16" (optional)	Other				
2" x 2" x 3/16" (optional)	Locking Frame -(optional)				
Other	1" x 1" x 3/16" (field welded)				
Material	Other				
☐ Cold Rolled Steel (standard)	Filter -(optional)				
☐ *Stainless Steel (optional)	☐ 1" Fire Retardant				
☐ *Aluminum (optional) - RRFG-1 only	Adapter -(optional)				
☐ *Galvanized (optional)	Square to round (shipped loose)				
Other	Finish				
*consult factory for availability	White Powder Coat (standard)				
Tamperproof Screws	Rust Inhibiting Prime Coat (optional)				<del>                                     </del>
1/4" - 20 x 3/8" pinned flat head torx	U Other				
machine screws (standard)	Other Options (please specify)				
Other					
OUDMITTAL APPROVAL	•		$\vdash$		<del>                                     </del>
SUBMITTAL APPROVAL  Job Name and Location					
Engineer Date	Factory	<u> </u>			
Eligilieei	Factory				

Date

Date

Submitted By

Mfr. Rep.