SUBMITTAL SHEET

Anemostat®
A MESTEK COMPANY
P.O. BOX 4938 • 1220 WATSONCENTER ROAD • CARSON, CA 90745-4206
(310) 835-7500 • FAX (310) 835-0448
e-mail: airsec@anemostat.com • website: www.anemostat.com

RRMX

MAXIMUM SECURITY

EXTRA HEAVY DUTY GRILLE with REMOVABLE STEEL PERFORATED FACE PLATE(S)

RRMX-1/RRMX-2

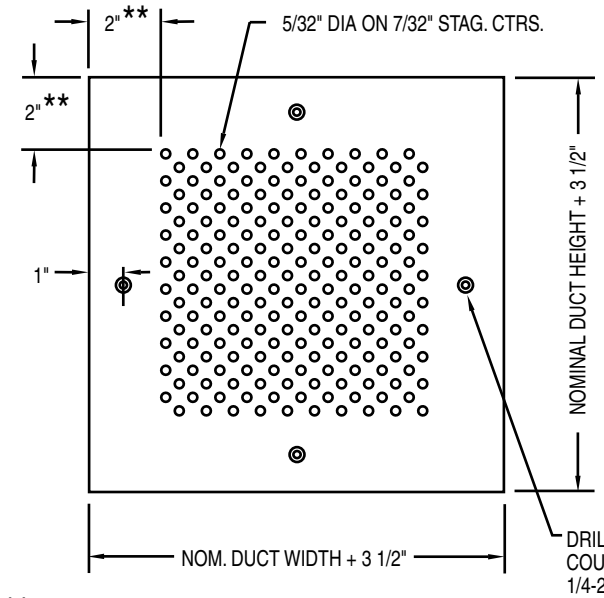

** 2" BORDER APPROXIMATE. THIS DIMENSION IS A FUNCTION OF SIZE AND PATTERN

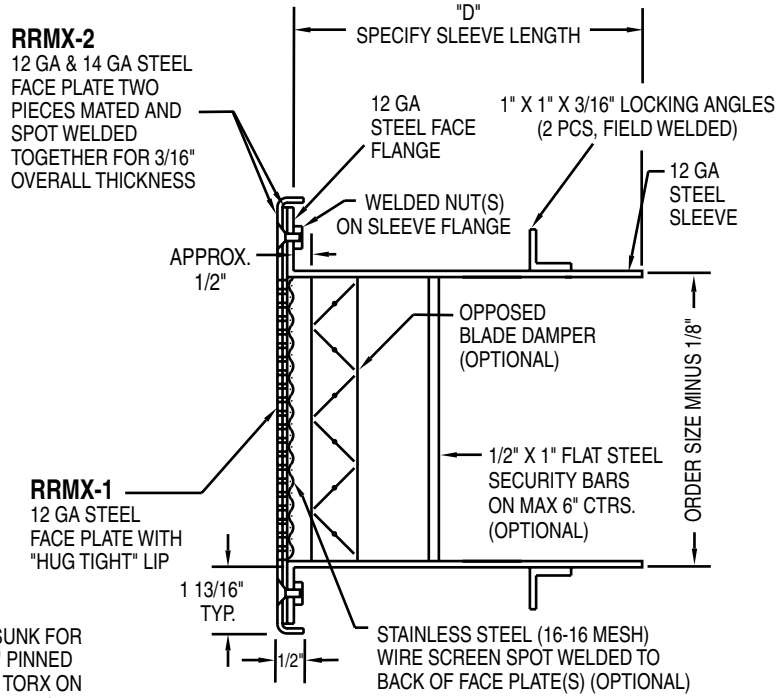

IMPORTANT: It is the specifier's responsibility to properly configure the HVAC system to meet the appropriate level of comfort, safety, security and detention

PRODUCT FEATURES

Face Plate

☐ **RRMX-1:** 12 GA. **(standard)** with 5/32" dia. holes on 7/32" stag. ctrs.

☐ **RRMX-2:** 12 GA./14 GA. = 3/16" **(standard)**

Sleeve

☐ 12 GA. **(standard)** ☐ 3/16" (optional)

☐ 10 GA. (optional) ☐ Other _____

Locking Angles (two pieces)

☐ 1" x 1" x 3/16" **(standard)**

☐ 1-1/2" x 1-1/2" x 3/16" (optional)

☐ 2" x 2" x 3/16" (optional)

☐ Other _____

Material

☐ Cold Rolled Steel **(standard)**

☐ *Stainless Steel (optional)

☐ *Aluminum (optional) - RRMX-1 only

☐ *Galvanized (optional)

☐ Other _____

*consult factory for availability

Tamperproof Screws

☐ 1/4" - 20 x 3/8" pinned flat head torx machine screws **(standard)**

☐ Other _____

Wire Screen -(optional)

☐ stainless steel (16-16 mesh)

Security Bars -(optional)

☐ 1/2" x 1" flat steel (max. 6" ctrs.)

☐ Other _____

Opposed Blade Damper -(optional)

☐ Front Operated

☐ Rear Operated

☐ Other _____

Anchoring Studs -(optional)

☐ Nelson Type (3" x 3/8")

☐ Other _____

Locking Frame -(optional)

☐ 1" x 1" x 3/16" (field welded)

☐ Other _____

Adapter -(optional)

☐ Square to round (shipped loose)

Finish

☐ White Powder Coat **(standard)**

☐ Rust Inhibiting Prime Coat (optional)

☐ Other _____

Other Options (please specify)

_____

Qty.	Order Size (Nominal Duct)		Sleeve Length
	W" x	H"	D

SUBMITTAL APPROVAL

Job Name and Location			
Engineer	Date	Factory	Date
Mfr. Rep.	Date	Submitted By	Date