

S-VENT[®]

SUBMITTAL SHEET





1220 WATSONCENTER ROAD • CARSON, CA 90745-4206
 (310) 835-7500 • FAX (310) 835-0448
 e-mail: airsec@anemostat.com • website: www.anemostat-hvac.com

SV432-FM

MAXIMUM SECURITY
 DIFFUSER
 without
 FACEPLATE DEFLECTION
 FACE MOUNTED with
 REAR INSTALLATION PLATE

TOP SECTION

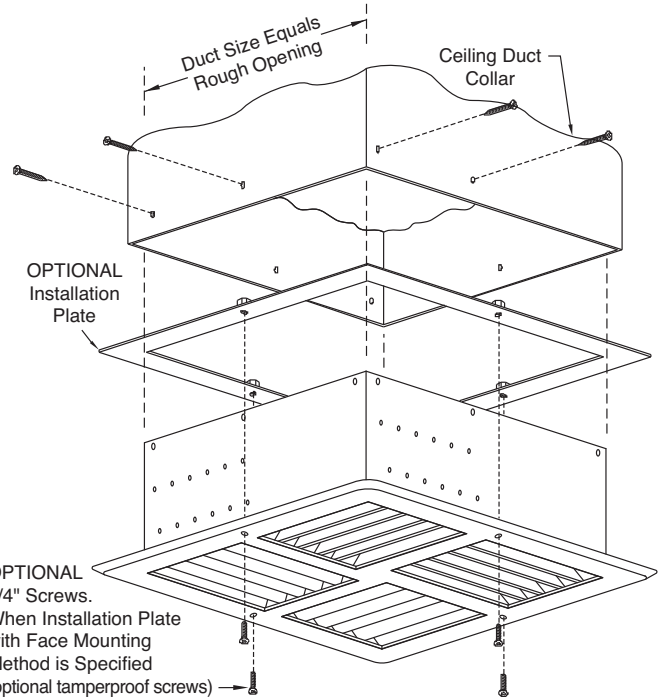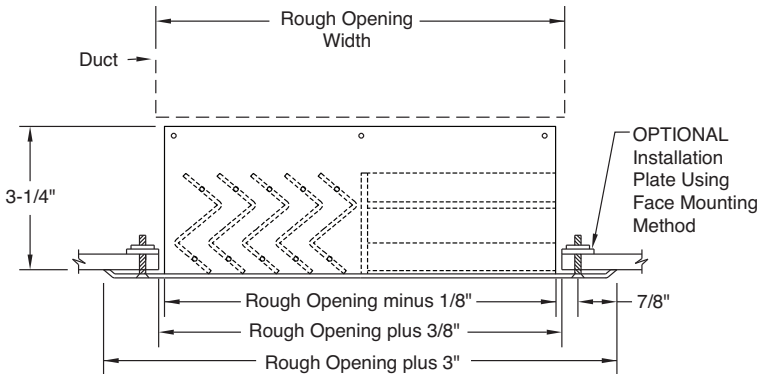


Grille Designation & Type	Rough Opening (inches)
SV432 - 8/8	08 x 08
SV432 - 12/12	12 x 12
SV432 - 16/16	16 x 16
SV432 - 20/20	20 x 20
SV432 - 24/24	24 x 24

Special Sizes available upon request.

IMPORTANT: It is the specifier's responsibility to properly configure the HVAC system to meet the appropriate level of comfort, safety, security and detention

THROW PATTERNS

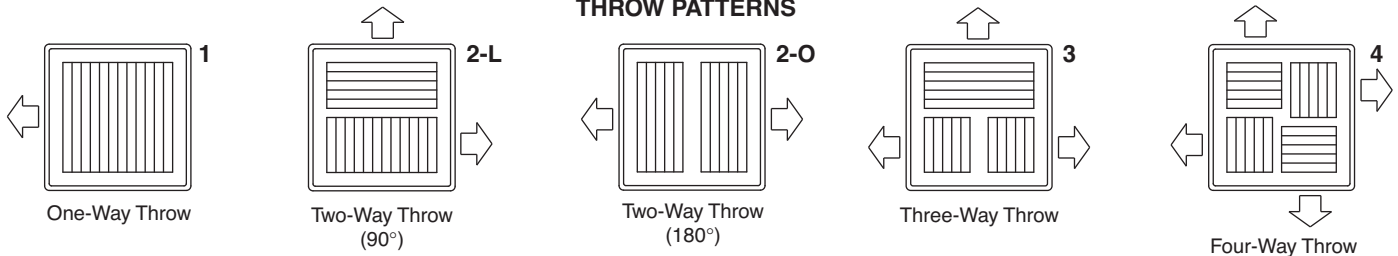

PRODUCT FEATURES

Face Flange

16 GA (standard)

Material Type

Steel (standard)

Horizontal Louvers/Vertical Mullions

16 GA with 3-1/4" Neck Depth (std)

Rear Installation Plate

16 GA (standard)

Finish

White Powder Coat (std)

Other Powder Coat Colors _____

Sleeve (optional)

16 GA - specify length _____

Opposed Blade Damper (optional) (shipped loose)

Rear Operated

QTY	ROUGH OPENING		THROW PATTERN
	W"	X H"	
27	9	9	2-L

SUBMITTAL APPROVAL

Job Name and Location			
Engineer	Date	Factory	Date
Mfr. Rep.	Date	Submitted By	Date

OCTOBER 2016
 NEW CONSTRUCTION
 S-VENT SECURITY PRODUCTS PAGE 14