


- Manual Ball Valve (In-Line)
- Venturi Flow Measurement
- Memory Stop
- Sizes 1/2", 3/4", 1"

Specifications:

- Nominal Working Pressure: 600 WOG
- Working Temperature:
-4°F (-20°C) ≤ t ≤ 230°F (110°C)
- Solder socket to ANSI B16.18
- Preset Non-Removable Venturi Inserts
- Cv's: 1/2": 0.23, 0.46, 0.87, 1.8, 3.3, 5.4
3/4": 0.55, 1.1, 2.2, 4.0, 6.7
1": 2.3, 5.4, 9.2, 20
1-1/4": 5.5, 9.8, 20, 24
1-1/2": 14, 19, 44
2": 13, 34, 56
- Outlet Connections FSWT or FNPT
- Inlet Connections FSWT, FNPT or MNPT
- Lever Handle
- 2 Pressure/Temperature Ports and 1 plug
- Memory Stop


Options:

- Extended Handles & Extended Pressure / Temperature Ports¹
- Stainless Steel Tag-Chain Upon Request

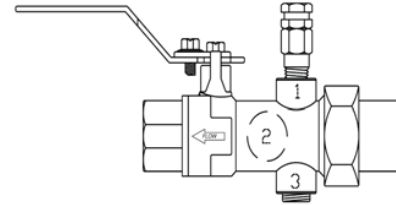

DIMENSIONS		
Size	"A"	"B"
1/2"	0.9	3.3
3/4"	0.9	3.5
1"	0.9	3.6
1-1/4"	0.9	5.1
1-1/2"	1	5.7
2"	1	6.5

MATERIAL SPECIFICATIONS	
Seats	PTFE
Ball	Brass
Stem	Brass
Handle	Steel
Valve Body	Brass
Screw/SelfTaping Screw	Steel
O-Rings	EPDM
Hex Socket Pipe Plug	Brass
Union Nut	Brass
Tailpiece	Brass
Fixed End	Brass
Pressure/Temperature Ports	Brass
Memory Stop	Steel

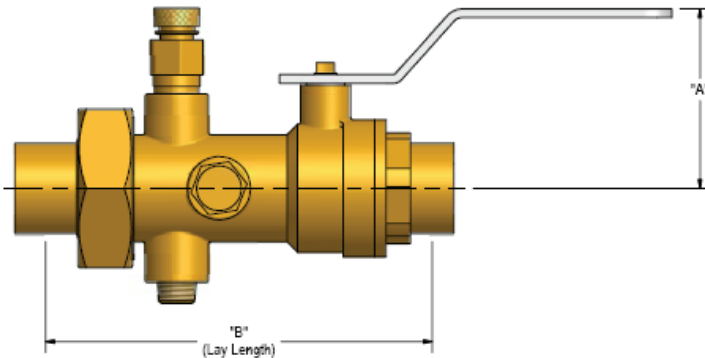

¹ Extended Handles cannot be ordered without extended Pressure/Temperature Ports

Manufactured by Hays Fluid Controls

All dimensions are in inches.

JOB NAME:

SUBMITTED BY: